XinDa

TAISHAN JIE DA ELECTRICAL CO.,LTD.

Address: South Industrial Zone, Dajiang Town, Taishan City, Guangdong, China
Tel : (+86750) 5436828 / 5431838 / 5431818 Fax: (+86750) 5438139
Http://www.ts-jieda.com Http://www.tsjieda.cn
E-mail: master@tsjieda.cn

XinDa

Public Health System Professional Service Provider

TAISHAN JIE DA ELECTRICAL CO.,LTD.








XinDa

TAISHAN JIE DA ELECTRICAL CO.,LTD.



COMPANY PROFILE

1992: Taishan Jie Da Electrical Appliances Co., Ltd. was founded and made its first hair dryer for the hotel business with the registered brand Xinda.
1994: Made the first hand dryer and at the same year extended the production line to soap dispenser,perfume dispenser, auto faucet, auto flush etc.
1995: First O.E.M order to England; new modern factory and workshop were built.
1998: Attended China Export Commodities Fair in Guangzhou exclusively for Chinese exporters.
2002: Established a sub-company Mind Inc. in Shanghai supervising the whole market with its own brand named Mind.
2003:Certificated ISO9001:2000, meanwhile the productivity reached 6 millions USD per year.
2004:The sub-company Jie Da USA Inc. was founded in New York for the United States and Canada markets.

After decades of development, Jie Da has become one of the best manufacturers for the hotel appliances (especially hair dryer), bathroom equipments (especially hand dryer) and so forth. To all our dearest business partners, we always hold 4G: GOOD QUALITY, GOOD DESIGN, GOOD PRICE and GOOD SERVICE.

Factory Outlook:

8 acres modern workshop with 6,500 ft^2 (2000 m^2) office and more than 500 professional workers.

Market Networks:

Domestic: 14 direct company representatives among coastal areas and more than 30 major national distributors.
Overseas: O.E.M. & O.D.M. distribute to Southeast Asia, Mid-East, South America, Europe, Russia and North America.

Market Strategy:

O.E.M., O.D.M., world-wide distributor wanted and more flexible co-operation plans.

NQA ISO9001 REGISTERED COMPANY UKAS QUALITY MANAGEMENT 015

ISO9001:2015



Contents

01 Company Introduction

04 Hand dryer

20 Stainless steel wall units

28 Paper towel dispenser

42 Soap dispenser

62 Sanitizer dispenser

72 Hair dryer

86 Automatic perfume dispenser

88 Multifunctional bathroom mirror combination series

96 Sensor bin

HAND DRYER





ABS WHITE



ABS METALLIC SILVER

JET HAND DRYER

GSQ70A

Characteristics:

*Long lifespan High-speed brushless DC motor which can produces 95 m/s jet airflow
*Dry hands in 6-12 seconds
*Controlled by CPU, display by LCD screen
*Hygienic filter bag, antibacterial and gases absorption
*Unique , energy-saving, economical and durable design

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	850W	850W
Current:	6A	11A
Degree of Protection:	IP 22	IP 22
Air volume:	220m^3/h	220m^3/h
Air velocity:	95m/s	95m/s
Noise Level:	>78dB	>78dB
Packing Size:	715x355x325mm	28 1/8"x14"x11 7/8"
Unit weight:	11.5kg	25.3lb
CTN QTY.: (1pc)	13kg	28.5lb
CTNS of 20'FT:	336pcs (336 CTNS)	





Installation template

Energy-saving comparison

Contrast / Use per day	power consumption per year		Power saving	
	GSQ70A	Common hand dryer	Power saving per year	Power saving for 5 per year
500(Times)	430(kWh)	4055(kWh)	3625(kWh)	18125(kWh)
1000(Times)	860(kWh)	8111(kWh) 2 hand dryers	7251(kWh)	36255(kWh)
1500(Times)	1290(kWh)	12166(kWh) 3 hand dryers	10876(kWh)	54380(kWh)
2000(Times)	1720(kWh)	16222(kWh) 4 hand dryers	14502(kWh)	72510(kWh)

Note:GSQ70A hand dryer is tested on the basis of 850W, the average drying time is 10 sec./Time.
A common hand dryer with 2000W, its average drying time is 40 sec./time.



Bi-directional Airflow



Large size LCD Display



Removable Water Tray



Brushless DC Motor



ABS WHITE



ABS METALLIC SILVER

JET HAND DRYER

GSQ80

Characteristics:

*High-speed brushless DC motor that which can produce 110 m/s jet airflow
*Dry hands in 5-10 seconds
*Controlled by CPU, display by LED Screen
*Alternative of cool or warm air
*Hygienic filter bag, antibacterial and gases absorption
*Unique , energy-saving, economical and durable design

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	1400W	1400W
Current:	8A	13A
Degree of protection:	IP22	IP22
Air volume:	200m³/h	200m³/h
Air velocity:	110m/s	110m/s
Noise Level:	>78dB	>78dB
Packing Size :	735x371x330mm	28 7/8"x14 5/8"x13"
Unit weight:	8.6kg	19lb
CTN QTY.: (1pc)	10.4kg	23lb
CTNS of 20'FT:	336pcs (336 CTNS)	





Installation template

Energy-saving profile

Contrast / Use per day	power consumption per year		Power saving	
	CSQ80	Common hand dryer	Power saving per year	Power saving for 5 per year
500(Times)	330(kWh)	4055(kWh)	3725(kWh)	18625(kWh)
1000(Times)	660(kWh)	8111(kWh) 2 hand dryers	7451(kWh)	37075(kWh)
1500(Times)	990(kWh)	12166(kWh) 3 hand dryers	11176(kWh)	55880(kWh)
2000(Times)	1320(kWh)	16222(kWh) 4 hand dryers	14902(kWh)	74510(kWh)

Note:GSQ80 hand dryer is tested on the basis of 650W(cool air running), the average drying time is 10 sec./Time.
A common hand dryer with 2000W, its average drying time is 40 sec./time.



Bi-directional Airflow + LED Lighting



Active Carbon Filter



Removable Water Tray



Brushless DC Motor



GSQ60K&GSQ60KS



GSQ60K1

AUTOMATIC HAND DRYER

GSQ60K (Purified model)

GSQ60KS (Sterilizing model)

GSQ60K1 (Quick insert installation model)















Brushless DC Motor



Smart heating illustrated

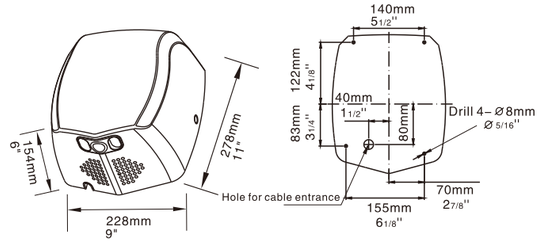

Installation template

Characteristics:

*Energy saving: Unique brushless motor, lowest power consumption, high efficiency, Round nozzle for concentrating air flow, quick drying process.
*Smart: Micro-smart control chip, coupled with advanced infrared processing technology to ensure accurate and reliable control. It automatically adjusts the heater depending on the air temperature surrounding the dryer, for better energy consumption.
*Comfortable: Low noise, high speed to dry hands quickly .
*Safe: This hand dryer has multiple protections against over temperature, over current and overtime.
*Endurable: Stainless steel cover with better anti-external impact and anti-drop protection.

*Purified model

Primary filter in front of fan house can filter large particles of dust and air. Second layer of HEPA filter can filter small dust.

*Sterilizing model

Primary filter in front of fan house can filter large particles of dust and air.Second layer of activated carbon filter can absorb gases and bacteria.The third layer is irradiated with specific wavelengths of UV light, the bacterial and viral DNA tissues will be destroyed.
The fourth layer with ceramic photocatalytic filter irradiated with UV light will activate the photocatalyst (TIO2) and produce hydrogen radicals (OH-), which can decompose molecular structure of the harmful components, inhibit the growth of bacteria and viruses, so as to sterilize, purify and deodorize fresh the air.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	800W	800W
Current:	3.5A	6.6A
Degree of Protection:	IP22	IP22
Air volume:	85m³/h	85m³/h
Air velocity:	75m/s	75m/s
Noise Level:	>70dB	>70dB
Packing Size :	565x325x410mm	22 1/4"x12 7/8"x16 1/8"
Unit weight:	3.3kg	7.3lb
CTN QTY.: (4pcs)	15.7kg	34.6lb
CTNS of 20'FT:	1400pcs (350 CTNS)	



GSQ120B
ABS METALLIC SILVER



GSQ120BK
STAINLESS STEEL SATIN FINISH

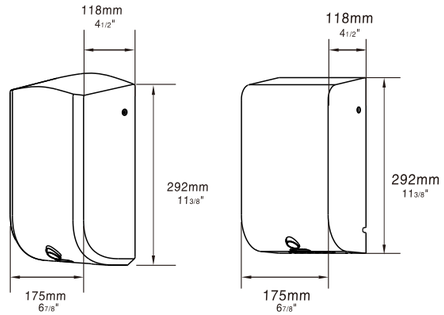

AUTOMATIC HAND DRYER

GSQ120B **GSQ120BK**

Characteristics:

*Using " HEPA filter screen + UV sterilization lamp + photocatalyst " for multiple filter and sterilize.
*Special brushless motor makes the product low power, high efficiency. Round wind nozzle can concentrate the air for fast drying.
*Using microcomputer intelligent control chip, combined with advanced infrared receiving digital processing technology, makes the product accurate and reliable.
*Low noise, high wind speed, instantly blow away the water droplets on hands, makes drying hands also enjoyable.
*Temperature over rise, over–current and over–time protection.
*The shell is made of ABS material, with a solid coating, makes it great–looking and durable.
*The shell can be available of stainless steel also, which is with better anti–external impact and anti drop protection.

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1200W	1200W
Current:	5.4A	10A
Degree of protection:	IP22	IP22
Air volume:	62m^3/h	62m^3/h
Air velocity:	67m/s	67m/s
Noise Level:	>72 dB	>72 dB
Packing Size :	490x380x610mm	22 1/2"x12 5/8"x17 3/4"
Unit weight:	1.35kg	2.9lb(GSQ120B)
	1.76kg	3.8lb(GSQ120BK)
CTN QTY.: (8pcs)	16kg	40 lb (GSQ120B)
	19.9kg	43.8lb (GSQ120BK)
CTNS of 20'FT:	1728pcs (216 CTNS)	



Brushless DC Motor



Smart heating illustrated

HAND DRYER



1. ABS housing construction



2 .Filter screen+ UV ray+ photocatalyst



3. Immaculate airflow



4. Customize high speed brushless motor



5. Dry your hands rapidly



6 .Sterilize and purify the air and environment





STAINLESS STEEL

AUTOMATIC HAND DRYER

GSQ91K

Characteristics:

*Energy saving: Unique high-speed motor, low overall power consumption, high efficiency, round nuzzle for concentrated air flow, and shorter drying process. With power rated which is less than half of other hand dryers.It can complete the drying process two times quicklier than them. Its specially designed heating element switch to easily shift between warm air and cold air, making it more energy saving and user friendly.

*Safe: This smart hand dryer has multiple protections against over temperature, over current, and overtime to prevent accidents.

*Comfortable: Micro-smart control chip, coupled with cutting edge digital infrared receiver processing technique to ensures accurate and reliable control. When you hand reaches within 10cm to the nuzzle, the hand dryer will automatically sense it and start to blow warm air. The hand dryer will stop working automatically after your hand is removed for 1second.

* Endurable: Enclosed stream-line stainless steel shell provides considerably improve water resistance.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	900W	900W
Current:	3.9A	7.5A
Degree of Protection:	IP 22	IP 22
Air volume:	105m³/h	105m³/h
Air velocity:	89m/s	89m/s
Noise Level:	>80 dB	>80 dB
Packing Size :	615x375x480mm	24 1/4"x14 7/8"x18 7/8"
Unit weight:	4kg	8.8lb
CTN QTY.: (4pcs)	19.3kg	42.5lb
CTNS of 20'FT:	864pcs (216 CTNS)	





Installation template



POWDER COATING CHROME-PLATING

AUTOMATIC HAND DRYER

GSQ83

Characteristics:

*High-efficiency: Brushless DC motor, 1/3 rated power of normal hand dryers, twice drying efficiency than normal's.

*Intelligence: Controlled by CPU with infrared sensor, heating element turn on/off automatically base on the environment temperature.

*Comfort: 3 sides jet flow creates a 3D Air for drying hands, makes hands drying become an enjoyment.

*Hygiene: Activated carbon antibacterial filter makes the flowing air pollution-free.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	1300W	1300W
Current:	5.7A	12A
Degree of protection:	IP22	IP22
Air volume:	202m³/h	202m³/h
Air velocity:	89m/s	89m/s
Packing Size :	760x395x285mm	30"x 15 5/8"x 11 1/4"
Unit weight:	6kg	13.2lb
CTN QTY.: (2pcs)	16.1kg	35.5lb
CTNS of 20'FT:	672pcs (336 CTNS)	





Installation template



STAINLESS STEEL SATIN FINISH

AUTOMATIC HAND DRYER

GSQ100K (Brushless DC Motor)

Characteristics:

* Energy-saving: With special brushless motor, the product features low rated power and high efficiency, 3D flat nozzle, provides concentrated blowing and fast drying.

* Intelligent: Adopting microcomputer intelligent control chip, combining with advanced infrared receiving and digital processing. technology It is advantaged at precise and reliable control. Real-time temperature monitoring, it provides step heating power adjustment according to different room temperature, which is more energy-saving.

* Comfortable: low noise, high blowing speed, it can instantly blow away the water droplets on hands. It makes blowing hands become a pleasure.

* Safe: This hand dryer has multiple protections such as temperature rise, overcurrent and overtime to avoid accident.

* Durable: It adopts stainless steel shell, and brings ability to resist external impact and drip-proof is greatly improved.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	1000W	1000W
Current:	4.7A	9A
Degree of Protection:	IP22	IP22
Air volume:	97m³/h	97m³/h
Air velocity:	82m/s	82 m/s
Noise Level:	>76 dB	>76 dB
Hand drying time:	35S	35S
Packing Size:	695x375x390mm	27 3/8"x14 3/4"x15 3/8"
Unit weight	3.2kg	7lb
CTN QTY.: (6pcs)	22.4kg	49.4lb
CTNS of 20'FT:	1350pcs (225 CTNS)	



Brushless DC Motor



Infrared Sensor



Smart heating illustrated







STAINLESS STEEL SATIN FINISH

AUTOMATIC HAND DRYER

GSQ120K (Universal Motor)

Characteristics:

* Energy saving: high-speed special motor, low power, high efficiency, round nozzle, centralized hot air flow, fast drying, its power rated is less than half of other hand dryers. The hand drying speed is twice as fast as common hand dryers.
* Safe: The intelligent hand dryer has multiple protections such as temperature buzzer, overcurrent and overtime to avoid accident.
* Automatic: Adopting microcomputer intelligent control chip, combining with advanced infrared receiving digital processing technology. It boasts precise and reliable control. When the hands are within 10cm range of the air outlet, the hand dryer automatically senses and outputs warm air, and automatically stops when the hands leave the air outlet for 1 second.
* Durable:It adopts stainless steel shell, and the ability of resisting external impact and drip -proof is greatly improved.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	1200W	1200W
Current:	5.45A	10A
Degree of Protection:	IP 22	IP 22
Air volume:	114m³/h	114m³/h
Air velocity:	97m/s	97m/s
Noise Level:	>80 dB	>80 dB
Hand drying time:	28S	28S
Packing Size:	695x355x390mm	27 3/8"x14"x15 3/8"
Unit weight	3.1kg	6.8lb
CTN QTY.:(6pcs)	21.8kg	48lb
CTNS of 20'FT:	1440pcs (240 CTNS)	





POWDER COATING



CHROME-PLATING



ABS WHITE



ABS METALLIC SILVER

AUTOMATIC HAND DRYER

GSQ87

Characteristics:

*High speed motor and higher efficiency: provide same hand-drying time as other hand dryers, but only cost half of power
*Multi-protections from overheating, overcurrent and overtime working
*Be controlled by CPU with infrared sensor: working accurately and reliably
*Alternative of cool or warm air
*With streamline die-cast cover; higher crash proofing and waterproof abilities

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	900W	900W
Current:	3.9A	8A
Degree of protection:	IP22	IP22
Air volume:	140m³/h	140m³/h
Air velocity:	64m/s	64m/s
Packing Size:	573x320x450mm	22 1/2"x12 5/8"x17 3/4"
Unit weight:	4kg	9lb
CTN QTY.:(4pcs)	18.5kg	40.7lb
CTNS of 20'FT:	1440pcs (360 CTNS)	





Installation template

AUTOMATIC HAND DRYER

GSQ88

Characteristics:

*High speed motor with lower rated power and higher efficiency; use 1/3 of the common dryers power, but provide 1/2 of the common dryers hand-dry time
*Multi-protections from overheating, overcurrent and overtime working
*Controlled by CPU with infrared sensor: working accurately and reliably
*The detachable water tray collector design can avoid wetting the floor
*Full-water indicator: easy to clean

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	880W	880W
Current:	3.8A	8A
Anti-electric-shock:	⧈	⧈
Degree of protection:	IP22	IP22
Air volume:	107m³/h	107m³/h
Air velocity:	103m/s	103m/s
Packing Size:	605x420x510mm	23 3/4"x16 1/2"x20 1/16"
Unit weight:	4.1kg	9lb
CTN QTY.:(4pcs)	20.2kg	44.5lb
CTNS of 20'FT:	720pcs (180 CTNS)	





Installation template



POWDER COATING



BRUSHED

AUTOMATIC HAND DRYER
GSQ89

Characteristics:

*High speed motor with lower rated power and higher efficiency; use less than half of the common hand dryer's power, but provide the same hand–dry time
*Streamline nozzle concentrates the air and makes dries hands more quickly
*Multi–protections from overheating, overcurrent and overtime working
*Controlled by CPU with infrared sensor for working accurate and reliable
*With streamline die cast cover; higher crash–proofing and waterproof abilities
*Supplied with LED, and it will automatically function when the hand dryer starts working

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	890W	890W
Current:	3.9A	8A
Degree of protection:	IP22	IP22
Air volume:	96m³/h	96m³/h
Air velocity:	106m/s	106m/s
Packing Size :	545x320x480mm	21 1/2"x12 5/8"x18 7/8"
Unit weight:	3.8kg	8.4lb
CTN QTY.:(4pcs)	17.6kg	38.8lb
CTNS of 20'FT:	1152pcs (288 CTNS)	





Installation template



POWDER COATING



SILVER POWDER COATING

AUTOMATIC HAND DRYER
GSQ90

Characteristics:

*High speed motor with lower rated power and higher efficiency; use less than half of the common hand dryer's power, and provide with the same hand–dry time
*Round nozzle design, concentrates the warm air flow
*Multi–protections from overheating, overcurrent and overtime working
*Controlled by CPU with infrared sensor to measure working accurate and reliable
*With streamline die–cast cover; higher crash–proofing and waterproof abilities

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	900W	900W
Current:	3.9A	8A
Degree of protection:	IP22	IP22
Air volume:	140m³/h	140m³/h
Air velocity:	64m/s	64m/s
Packing Size :	640x365x445mm	25 1/4"x14 3/8"x17 1/2"
Unit weight:	4.3kg	9.5lb
CTN QTY.:(4pcs)	20.1kg	44.3lb
CTNS of 20'FT:	1080pcs (270 CTNS)	





Installation template



POWDER COATING

AUTOMATIC HAND DRYER
GSX-1800

Characteristics:

*Digital circuit, infrared sensor with good anti–interference ability
*Sleek circular arc design with die cast cover
*Long lifespan motor
*60 seconds for each hand drying cycle
*Durable and fireproofing

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1800W	1500W
Current:	7.8A	13.6A
Degree of protection:	IPX1	IPX1
Air volume:	147m³/h	147m³/h
Air velocity:	18m/s	18m/s
Packing Size :	600x300x470mm	23 5/8"x11 7/8"x18 1/2"
Unit weight:	2.5kg	5.5lb
CTN QTY.:(4pcs)	16.7kg	36.8lb
CTNS of 20'FT:	1260pcs (315 CTNS)	





Installation template



POWDER COATING

AUTOMATIC HAND DRYER
GSX-1800A

Characteristics:

*Digital circuit, infrared sensor with good anti–interference ability
*Sleek circular arc design with die cast cover
*Long life span motor
*60 seconds for each hand drying cycle
*Durable and fire proofing

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1800W	1500W
Current:	7.8A	13.6A
Degree of protection:	IPX1	IPX1
Air volume:	147m³/h	147m³/h
Air velocity:	18m/s	18m/s
Packing Size :	605x325x498mm	23 7/8"x12 7/8"x19 5/8"
Unit weight:	3.2kg	7lb
CTN QTY.:(4pcs)	15.9kg	35lb
CTNS of 20'FT:	1008pcs (252 CTNS)	





Installation template



POWDER COATING



BRUSHED



POWDER COATING



BRUSHED

AUTOMATIC HAND DRYER

GSQ130

Characteristics:

*Digital circuit, infrared sensor with good anti–interference ability
*high blowing rate, low noise, high wind speed, short hand–dry time
*Die cast base, aluminium alloy cover, durable and fireproof

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1300W	1300W
Current:	5.7A	11.8A
Degree of protection:	IP21	IP21
Air volume:	160m³/h	160m³/h
Air velocity:	17m/s	17m/s
Packing Size :	590x302x450mm	23 1/4"x11 7/8"x17 3/4"
Unit weight:	3.2kg	7lb
CTN QTY.:(6pcs)	22.4kg	49.3lb
CTNS of 20'FT:	1890pcs (315 CTNS)	

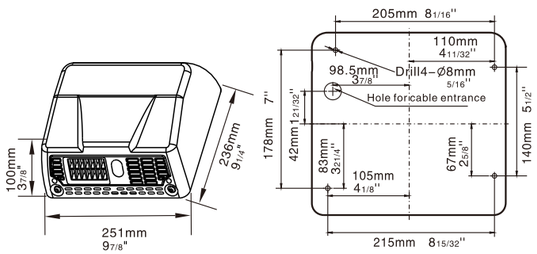

Installation template

AUTOMATIC HAND DRYER

GSQ250

Characteristics:

*Digital circuit, infrared sensor with good anti–interference ability
*Long lifespan motor, high blowing rate, 10–15 seconds hand–dry time
*Durable, crash–proof and energy saving
*360° revolving nozzle

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	2500W	1700W
Current:	10.9A	15.5A
Degree of protection:	IPX1	IPX1
Air volume:	270m³/h	270m³/h
Air velocity:	30m/s	30m/s
Packing Size :	565x330x495mm	22 1/4"x13"x19 1/2"
Unit weight:	5.6kg	12.3lb
CTN QTY.:(4pcs)	25.5kg	56.2lb
CTNS of 20'FT:	1120pcs (280 CTNS)	

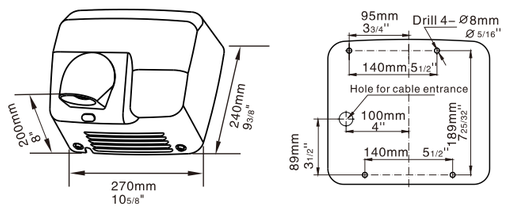

Installation template



POWDER COATING



BRUSHED



POWDER COATING



BRUSHED

AUTOMATIC HAND DRYER

GSQ250B

Characteristics:

*New and unique design
*Digital circuit, infrared sensor with good anti–interference ability
*Long lifespan motor, high blowing rate, 10–15 seconds hand–dry time
*Durable, crash–proofing and energy saving
*360° revolving nozzle

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	2500W	1700W
Current:	10.9A	15.5A
Degree of protection:	IPX1	IPX1
Air volume:	270m³/h	270m³/h
Air velocity:	30m/s	30m/s
Packing Size :	565x330x495mm	22 1/4"x13"x19 1/2"
Unit weight:	5.7kg	12.6lb
CTN QTY.:(4pcs)	25.3kg	55.8lb
CTNS of 20'FT:	1120pcs (280 CTNS)	

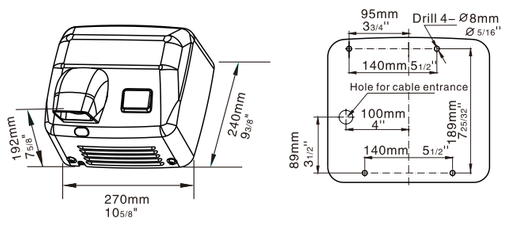

Installation template

TOUCH HAND DRYER

GSQ250C

Characteristics:

*New and unique design
*Digital circuit, infrared sensor with good anti–interference ability
*Long lifespan motor, high blowing rate, 10–15 seconds hand–dry time
*Durable, crash–proofing and energy saving
*360° revolving nozzle
*35 seconds every press

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	2500W	1700W
Current:	10.9A	15.5A
Degree of protection:	IPX1	IPX1
Air volume:	270m³/h	270m³/h
Air velocity:	30m/s	30m/s
Packing Size :	565x330x495mm	22 1/4"x13"x19 1/2"
Unit weight:	5.4kg	11.9lb
CTN QTY.:(4pcs)	24.5kg	54lb
CTNS of 20'FT:	1120pcs (280 CTNS)	

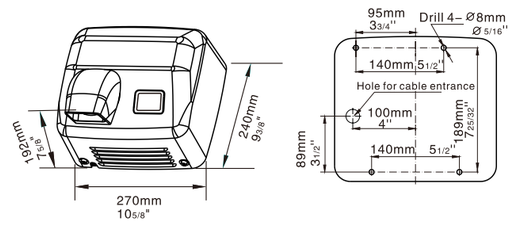

Installation template



ABS WHITE



BRUSHED

AUTOMATIC HAND DRYER
GSQ250A

Characteristics:

*New and unique design, metal and ABS white are available.
*Digital circuit, infrared sensor with good anti–interference ability
*Long lifespan motor, high blowing rate, 10–15 seconds hand–dry time
*Durable, crash–proofing and energy saving

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	2500W	1700W
Current:	10.9A	15.5A
Degree of protection:	IPX1	IPX1
Air volume:	270m³/h	270m³/h
Air velocity:	30m/s	30m/s
Packing Size :	574x325x385mm	22 5/8"x12 1/4"x15 1/8"
Unit weight（metal）:	5.1kg	11.2lb
Unit weight（ABS）:	2.9kg	6.4lb
CTN QTY.（metal）:(4pcs)	22.8kg	50.2lb
CTN QTY.（ABS）: (4pcs)	14.1kg	31lb
CTNS of 20'FT:	1728pcs (432 CTNS)	





Installation template





Installation template

AUTOMATIC HAND DRYER
GSX-2000

Characteristics:

*Digital circuit, infrared sensor with good anti–interference ability
*Decorative appearance with die cast cover
*Quiet, powerful and long lifespan motor
*Waterproof and fireproof

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1600W	1400W
Current:	7A	12.7A
Degree of protection:	IPX1	IPX1
Air volume:	181m³/h	181m³/h
Air velocity:	12m/s	12m/s
Packing Size :	500x330x445mm	19 3/4"x13"x17 1/2"
Unit weight:	3.3kg	7.3lb
CTN QTY.: (4pcs)	15.3kg	33.7lb
CTNS of 20'FT:	1540pcs (385 CTNS)	



ABS WHITE

AUTOMATIC HAND DRYER
GSX-1900 **GSX-1900A**

Characteristics:

*Beautiful design with compact ABS plastic cover
*Easy to install and operate
*Environmentally friendly and crash–proofing
*GSX–1900: Hand touch, 35 seconds every press
*GSX–1900A: Touch free, sensor technology

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1000W	1000W
Current:	4.3A	9.1A
Anti–electric–shock:	□	□
Degree of protection:	IPX1	IPX1
Air volume:	66m³/h	66m³/h
Air velocity:	13m/s	13m/s
Packing Size :	715x337x400mm	28"x13 1/4"x15 7/8"
Unit weight:	1.5kg	3.3lb
CTN QTY.: (6pcs)	12.2kg	26.9lb
CTNS of 20'FT:	1530pcs (255 CTNS)	





Installation template



ABS WHITE

AUTOMATIC HAND DRYER
GSQ150

Characteristics:

*Digital circuit, infrared sensor with good anti–interference ability
*High speed motor with short hand–dry time and low noise
*Plastic cover design according to the structure of class II appliance
*Durable, reliable and elegant

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1500W	1500W
Current:	6.5A	13.6A
Anti–electric–shock:	□	□
Degree of protection:	IP22	IP22
Air volume:	88m³/h	88m³/h
Air velocity:	15m/s	15m/s
Packing Size:	706x292x366mm	27 7/8"x14 1/2"x14 3/8"
Unit weight:	1.7kg	3.7lb
CTN QTY.: (6pcs)	12.6kg	27.8lb
CTNS of 20'FT:	2304pcs (384CTNS)	





Installation template

STAINLESS STEEL WALL UNITS



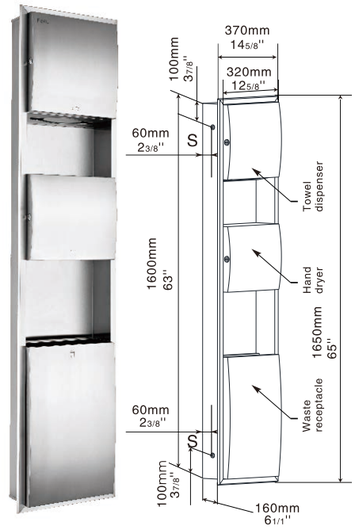

RECESSED TOWEL DISPENSER /HAND DRYER/WASTE RECEPTACLE

GSG82-25-H

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with satin finish, which is durable and steady
*Manual paper towel dispenser:Suitable for multi–fold paper towel
*Auto Hand dryer:
1.Controlled by CPU with digital circuit and infrared sensor, touch free;
2.With strong warm air, dries hands quickly;
3.Includes thermal fuse and thermostat, double safeguard;
*Waste receptacle: 23L big capacity and easy to clean
*1 key for 3 locks

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	2500W	1700W
Current:	10.9A	15.5A
Air volume:	270m³/h	270m³/h
Air velocity:	30m/s	30m/s
Packing Size :	1770x490x290mm	67 1/2"x17 1/8"x9 1/4"
Unit weight:	20.3kg	44.8lb
CTN QTY.:(1pc)	22.8kg	50.3lb
CTNS of 20'FT:	150pcs (150 CTNS)	

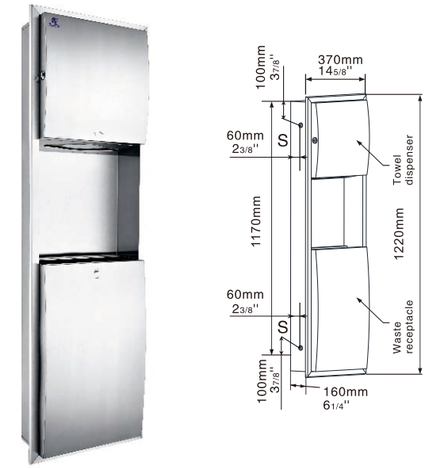

RECESSED TOWEL DISPENSER /WASTE RECEPTACLE

GSG63A-H

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with satin finish, which is durable and steady
*Manual paper towel dispenser:Suitable for multi–fold paper towel
*Waste receptacle: 23L big capacity and easy to clean
*1 key for 2 locks

Specifications:

Packing Size :	1290 x 435 x 235mm	50 7/8"x17 1/8"x9 1/4"
Unit weight:	11.7kg	25.8lb
CTN QTY.:(1pc)	13.8kg	30.4lb
CTNS of 20'FT:	210pcs (210 CTNS)	





TOWEL DISPENSER

GSG21-H

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with satin finish, which is durable and steady
*Manual paper towel dispenser:Suitable for multi-fold paper towel

Specifications:

Packing Size:	650 x 490 x 290mm	25 1/2"x19 1/4"x11 3/8"
Unit weight:	4.3kg	9.5lb
CTN QTY.:(1pc)	6kg	13lb
CTNS of 20'FT:	336pcs (336 CTNS)	





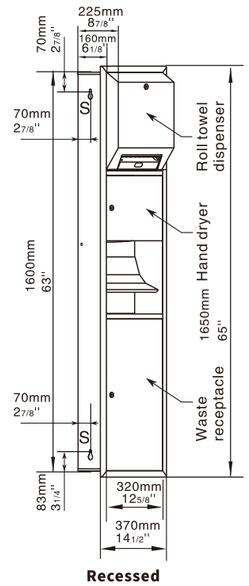

Recessed

RECESSED ROLL TOWEL DISPENSER /HAND DRYER/WASTE RECEPTACLE

GSG82-25Z

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with satin frosted processing which is durable and steady
*Auto paper towel dispenser:
1.Adopt infrared sensor, touch free;
2.Three dispense lengths are available;
3.Reloaded with a full roll automatically when finish an existing roll;
*Auto Hand dryer:
1.Controlled by CPU with digital circuit and infrared sensor, touch free;
2.With strong warm air flow, dries hands quickly;
3.Includes thermal fuse and thermostat, double safeguard;
*Waste receptacle: 23L big capacity and easy to clean
*1 key for 3 locks

Specifications:

Auto roll towel dispenser	Hand dryer
Power: DC 4 x 1.5 R20S Paper roll size: width 195mm~200mm (71/2" ~8") dia.≤200mm(8") Choices of dispense length: 200mm, 250mm, 300mm (8", 87/8", 117/8")	Voltage: 220V~240V~/50Hz (110V~120V/60Hz) Power: 2500W(1700W) Consumption:10.9A(15.5A) Air volume:270m3/h Air velocity: 30m/s
Unit weight: 22.2kg(49 lb) CTN QTY.: (1pc/ctn) 1715 x 435 x 300mm(671/2" x 171/8" x 117/8") 24.7kg(54.5 lb) CTNS of 20'FT: 105pcs (105 CTNS)	



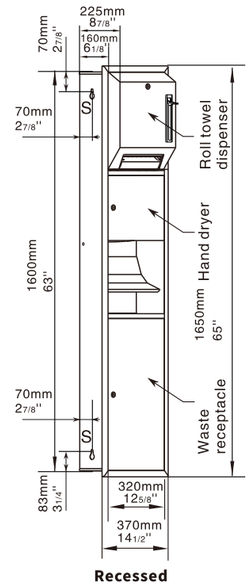

Recessed

RECESSED ROLL TOWEL DISPENSER /HAND DRYER/WASTE RECEPTACLE

GSG82-25S

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with frosted processing, which is durable and steady
*Manual paper towel dispenser:
1.Paper towel comes out automatically when pulling the handle down ;
2.With the indented blade, tear out the paper easily;
*Auto Hand dryer:
1.Controlled by CPU with digital circuit and infrared sensor, touch free;
2.With strong warm air flow, dries hands quickly;
3.Includes thermal fuse and thermostat, double safeguard;
*Waste receptacle: 23L big capacity and easy to clean
*1 key for 3 locks

Specifications:

Roll towel dispenser	Hand dryer
Paper roll size: width 195mm~200mm (71/2" ~8") dia.≤200mm(8"). Max dispense length: 120mm(46/8")	Voltage: 220V~240V~/50Hz (110V~120V/60Hz) Power: 2500W(1700W) Consumption:10.9A(15.5A) Air volume:270m3/h Air velocity: 30m/s
Unit weight: 21.7kg(47.8 lb) CTN QTY.:(1pc/ctn) 1715 x 435 x 300mm(671/2" x 171/8" x 117/8") 24.3kg(53.6lb) CTNS of 20'FT: 105pcs (105 CTNS)	



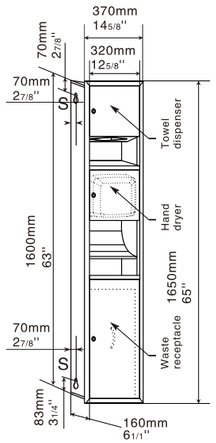

Recessed

RECESSED TOWEL DISPENSER /HAND DRYER/WASTE RECEPTACLE

GSG82-25

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with frosted processing, which is durable and steady
*Manual paper towel dispenser:Suitable for multi-fold paper towel
*Auto Hand dryer:
1.Controlled by CPU with digital circuit and infrared sensor, touch free;
2.With strong warm air flow, dries hands quickly;
3.Includes thermal fuse and thermostat, double safeguard;
*Waste receptacle: 23L big capacity and easy to clean
*1 key for 3 locks

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	2500W	1700W
Current:	10.9A	15.5A
Air volume:	270m3/h	270m3/h
Air velocity:	30m/s	30m/s
Packing Size :	1715x435x235mm	67 1/2"x17 1/8"x9 1/4"
Unit weight:	20.3kg	44.8lb
CTN QTY.:(1pc)	22.5kg	49.6lb
CTNS of 20'FT:	150pcs (150 CTNS)	



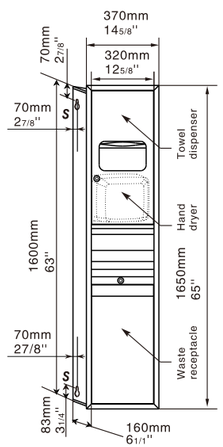

Recessed

RECESSED TOWEL DISPENSER /HAND DRYER/WASTE RECEPTACLE

GSG82-25B

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with frosted processing, which is durable and steady
*Manual paper towel dispenser:Suitable for multi-fold paper towel
*Auto Hand dryer:
1.Controlled by CPU with digital circuit and infrared sensor, touch free;
2.With strong warm air flow, dries hands quickly;
3.Includes thermal fuse and thermostat, double safeguard;
*Waste receptacle: 23L big capacity and easy to clean
*1 key for 3 locks

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	2500W	1700W
Current:	10.9A	15.5A
Air volume:	270m3/h	270m3/h
Air velocity:	30m/s	30m/s
Packing Size :	1715x435x235mm	67 1/2"x17 1/8"x9 1/4"
Unit weight:	21kg	46.2lb
CTN QTY.:(1pc)	23.3kg	51.4lb
CTNS of 20'FT:	150pcs (150 CTNS)	



RECESSED TOWEL DISPENSER /WASTE RECEPTACLE

GSG63A

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with frosted processing, which is durable and steady
*Manual paper towel dispenser:Suitable for multi-fold paper towel
*Waste receptacle: 23L big capacity and easy to clean
*1 key for 2 locks

Specifications:

Packing Size :	1365 x 435 x 235mm	53 3/4"x17 1/4"x9 3/8"
Unit weight:	12.3kg	27.1lb
CTN QTY.:(1pc)	14kg	30.8lb
CTNS of 20'FT:	200pcs (200 CTNS)	

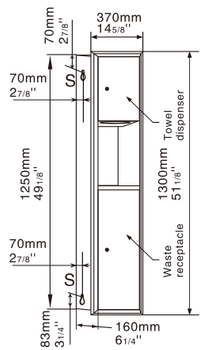

Recessed



TOWEL DISPENSER

GSG21

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with frosted processing, which is durable and steady
*Manual paper towel dispenser:Suitable for multi-fold paper towel

Specifications:

Packing Size :	595 x 435 x 215mm	23 3/8"x17 1/8"x8 1/2"
Unit weight:	4.3kg	9.5lb
CTN QTY.:(1pc)	5.5kg	12.1lb
CTNS of 20'FT:	495pcs (495 CTNS)	



Recessed

STAINLESS STEEL WALL UNITS



TOWEL DISPENSER
/WASTE RECEPTACLE

GSG33W

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with frosted processing, which is durable and steady
*Manual paper towel dispenser:Suitable for multi–fold paper towel
*1 key for 2 locks

Specifications:

Packing Size:	1370x465x215mm	54"x18 1/4"x8 1/2"
Unit weight:	11.9kg	26.2lb
CTN QTY.:(1pc)	14kg	30.8lb
CTNS of 20'FT:	220pcs (220 CTNS)	



Surface mounted



Installation template



TOWEL DISPENSER
/WASTE RECEPTACLE

GSG50W

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with frosted processing, which is durable and steady
*Manual paper towel dispenser:Suitable for multi–fold paper towel
*1 key for 2 locks

Specifications:

Packing Size:	1315x415x215mm	51 3/4"x16 3/8"x8 1/2"
Unit weight:	12kg	26.5lb
CTN QTY.:(1pc)	14.3kg	31.5lb
CTNS of 20'FT:	220pcs (220 CTNS)	

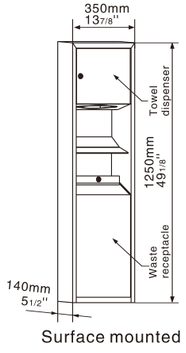

Surface mounted



Installation template

PAPER TOWEL DISPENSER





STAINLESS STEEL
AUTO ROLL TOWEL DISPENSER

CZQ20K-H

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Touch free, sensor technology
*1 second interval between two dispenses, avoid wasting paper
*Reload a new roll automatically when finish an existing roll
*Battery powered



Specifications:

Motion voltage(Optional):	AC100–240V~/50/60Hz	
Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Paper roll size:	W195mm~200mm(7 5/8"~7 7/8"),dia.≤200mm(7 7/8")	
Dispense lengths:	200mm,250mm,300mm	7 7/8",9 7/8",11 7/8"
Packing Size:	445x345x285mm	17 1/2"x13 1/2"x11 1/8"
Unit weight:	5.5kg	12.1lb
CTN QTY.:(1pc)	6.4kg	14.1lb
CTNS of 20'FT:	680pcs (680 CTNS)	



PAPER TOWEL DISPENSER



PAPER TOWEL DISPENSER

CZQ25

Characteristics:

* Manual pull–down paper dispense design. Gently pull the paper with both hands, the paper will come out and automatically cut off. Environmentally friendly and save more energy.
* Each time dispense about 250mm paper, and the paper is quantitatively dispense,eliminating energy consumption and saving costs
* Made of ABS plastic material, durable and stable;
* Easy to change paper, suitable for a wide variety of paper. Single–layer rolls with a diameter less than or equal to 210mm and a width of 195~220mm is suitable for this machine.

Specifications:

Paper roll size:	W195mm~220mm(7 1/2"~8 1/2"),dia.≤210mm(8 1/4")	
Dispense lengths:	250mm	9 7/8"
Packing Size:	415x345x290mm	16 3/8"x13 1/2"x11 3/8"
Unit weight:	3.2kg	7 lb
CTN QTY.: (1pc)	3.7kg	8.1lb
CTNS of 20'FT:	768CTNS(768pcs)	





PAPER TOWEL DISPENSER

CZQ25K1

Characteristics:

*Beautiful and luxurious appearance, novel design, with strong decorative effect
*Using durable imported stainless steel
*Manual design, eliminating energy consumption and saving costs

Specifications:

Paper roll size:	W195mm~220mm(7 1/2"~8 1/2"),dia.≤210mm(8 1/4")	
Dispense lengths:	250mm	9 7/8"
Packing Size:	430x380x295mm	16 7/2"x14 7/8"x11 1/2"
Unit weight:	5.4kg	11.9lb
CTN QTY.: (1pc)	6.4kg	
CTNS of 20'FT:	667CTNS(667pcs)	





PAPER TOWEL DISPENSER
CZQ25K2

Characteristics:

*Beautiful and luxurious appearance, novel design, with strong decorative effect
*Using durable imported stainless steel
*Manual design, eliminating energy consumption and saving costs

Specifications:

Paper roll size:	W195mm~220mm(7 1/2"~8 1/2"),dia.≤210mm(8 1/4")	
Dispense lengths:	250mm	9 7/8"
Packing Size:	430x380x295mm	16 7/2"x14 7/8"x11 1/2"
Unit weight:	5.4kg	11.9lb
CTN QTY.: (1pc)	6.4kg	14.1lb
CTNS of 20'FT:	667CTNS(667pcs)	





PAPER TOWEL DISPENSER
CZQ25K3

Characteristics:

*Beautiful and luxurious appearance, novel design, with strong decorative effect
*Using durable imported stainless steel
*Manual design, eliminating energy consumption and saving costs

Specifications:

Paper roll size:	W195mm~220mm(7 1/2"~8 1/2"),dia.≤210mm(8 1/4")	
Dispense lengths:	250mm	9 7/8"
Packing Size:	430x380x295mm	16 7/2"x14 7/8"x11 1/2"
Unit weight:	5.4kg	11.9lb
CTN QTY.: (1pc)	6.4kg	14.1lb
CTNS of 20'FT:	667CTNS(667pcs)	





AUTO ROLL TOWEL DISPENSER
CZQ20

Characteristics:

*Touch free, sensor technology
*1 second interval between two dispenses, avoid paper waste
*Reload a new roll automatically when finish an existing roll
*Battery powered

Specifications:

Motion voltage(Optional):	AC100–240V~/50/60Hz	
Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Paper roll size:	W195mm~200mm(7 5/8"~7 7/8"),dia.≤200mm(7 7/8")	
Dispense lengths:	200mm,250mm,300mm	7 7/8",9 7/8",11 7/8"
Packing Size:	445x345x290mm	17 1/2"x13 1/2"x11 3/8"
Unit weight:	3kg	6.6lb
CTN QTY.:(1pc)	4kg	8.8lb
CTNS of 20'FT:	680pcs (680 CTNS)	





STAINLESS STEEL AUTO ROLL TOWEL DISPENSER
CZQ20K

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Touch free, sensor technology
*1 second interval between two dispenses, avoid wasting paper
*Reload a new roll automatically when finish an existing roll
*Battery powered

Specifications:

Motion voltage(Optional):	AC100–240V~/50/60Hz	
Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Paper roll size:	W195mm~200mm(7 5/8"~7 7/8"),dia.≤200mm(7 7/8")	
Dispense lengths:	200mm,250mm,300mm	7 7/8",9 7/8",11 7/8"
Packing Size:	445x345x285mm	17 1/2"x13 1/2"x11 3/8"
Unit weight:	5kg	11lb
CTN QTY.:(1pc)	5.8kg	12.8lb
CTNS of 20'FT:	680pcs (680 CTNS)	





STAINLESS STEEL AUTO ROLL TOWEL DISPENSER

CZQ20K-R

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Touch free, sensor technology
*1 second interval between two dispenses, avoid paper waste
*Reload a new roll automatically when finish an existing roll
*Battery powered

Specifications:

Motion voltage(Optional):AC100–240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Paper roll size:	W195mm~200mm(7 5/8''~7 7/8''),dia.≤200mm(7 7/8'')	
Dispense lengths:	200mm,250mm,300mm	7 7/8'',9 7/8'',11 7/8''
Packing Size :	445x345x285mm	17 1/2''x13 1/2''x11 1/8''
Unit weight:	5kg	11lb
CTN QTY.:(1pc)	5.8kg	12.8lb
CTNS of 20'FT:	680pcs (680 CTNS)	





STAINLESS STEEL MANUAL ROLL TOWEL DISPENSER

CZQ20K-R1

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Touch free, sensor technology
*1 second interval between two dispenses, avoid paper waste
*Reload a new roll automatically when finish an existing roll
*Battery powered

Specifications:

Motion voltage(Optional):AC100–240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Paper roll size:	W195mm~200mm(7 5/8''~7 7/8''),dia.≤200mm(7 7/8'')	
Dispense lengths:	200mm,250mm,300mm	7 7/8'',9 7/8'',11 7/8''
Packing Size :	445x345x285mm	17 1/2''x13 1/2''x11 1/8'
Unit weight:	5kg	11lb
CTN QTY.:(1pc)	5.8kg	12.8lb
CTNS of 20'FT:	680pcs (680 CTNS)	





MANUAL ROLL TOWEL DISPENSER

CZQ20S

Characteristics:

*Dispense manually; functioning without any power, energy conservation
*Easy to handle
*Reload a new roll automatically when finish an existing roll

Specifications:

Max dispense length: 120mm(4 5/8'')

Paper roll size:	W195mm~200mm(7 5/8''~7 7/8''),dia.≤200mm(7 7/8'')	
Packing Size :	445x345x290mm	17 1/2''x13 1/2''x11 3/8''
Unit weight:	2.6kg	5.7lb
CTN QTY.:(1pc)	3.4kg	7.5lb
CTNS of 20'FT:	680pcs (680 CTNS)	





STAINLESS STEEL MANUAL ROLL TOWEL DISPENSER

CZQ20KS

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Dispense manually; functioning without any power, save cost
*Easy to handle
*Reload a new roll automatically when finish an existing roll

Specifications:

Max dispense length: 120mm(4 5/8'')

Paper roll size:	W195mm~200mm(7 5/8''~7 7/8''), dia.≤200mm(7 7/8'')	
Packing Size :	445x345x285mm	17 1/2''x 13 1/2''x 11 1/8''
Unit weight:	4.5kg	10lb
CTN QTY.:(1pc)	5.5kg	12.1lb
CTNS of 20'FT:	680pcs (680 CTNS)	



PAPER TOWEL DISPENSER



TOWEL DISPENSER
ZJH6

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Guide rails for paper towels
*Stylish paper towel viewing indicator
*Lockable

Specifications:

Packing Size:	580x320x545mm	22 7/8"x12 5/8"x20 7/16"
Unit weight:	1.9kg	4.2lb
CTN QTY.: (10pcs)	21.6kg	47.6lb
CTNS of 20'FT:	2880pcs (288 CTNS)	





TOWEL DISPENSER
ZJH6W1

Characteristics:

*Quality grade 304 stainless steel 22guage
*Guide rails for paper towels
*Stylish paper towel viewing indicator
*Lockable

Specifications:

Packing Size:	580x315x655mm	22 7/8"x12 3/8"x25 3/4"
Unit weight:	1.27kg	2.8lb
CTN QTY.: (10pcs)	16kg	35.3lb
CTNS of 20'FT:	2100CTNS(210pcs)	



PAPER TOWEL DISPENSER



TOWEL DISPENSER
ZJH12H

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Stylish paper towel viewing indicator
*Lockable

Specifications:

Packing Size:	600x395x415mm	15 1/4"x10"x10 1/2"
Unit weight:	3.6kg	7.9lb
CTN QTY.: (6pcs)	24kg	53lb
CTNS of 20'FT:	1890pcs (315 CTNS)	





TOWEL DISPENSER
ZJH11

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Stylish paper towel viewing indicator
*Lockable

Specifications:

Packing Size:	580x410x600mm	22 7/8"x16 1/8"x23 5/8"
Unit weight:	2.2kg	4.8lb
CTN QTY.: (10pcs)	25.4kg	56lb
CTNS of 20'FT:	1680pcs(168 CTNS)	





ROLL TISSUE HOLDER

JZH275K

Characteristics:

*Available in satin stainless steel or white finish, see options
*Quality grade 304 stainless steel 22guage (0.8mm)
*Unique stylish design, easy viewing indicator
*Size: Ø280mm, Depth: 130mm
*Maximum roll size: Ø250mm, D100mm
*Inner core: Ø43mm and Ø54mm

Specifications:

Packing Size:	590x410x305mm	23 1/4"x16 1/8"x12"
Unit weight:	1.5kg	3.3lb
CTN QTY.:(6pcs)	11.5kg	25.4lb
CTNS of 20'FT:	3234pcs (539 CTNS)	





POWDER COATING BRUSHED

ROLL TISSUE HOLDER

JZH25K

Characteristics:

*Available in satin stainless steel or white finish, see options
*Quality grade 304 stainless steel 22guage (0.8mm)
*Unique stylish design, easy viewing indicator
*Size: Ø280mm, Depth: 130mm
*Maximum roll size: Ø250mm, D100mm
*Inner core: Ø43mm and Ø54mm

Specifications:

Packing Size:	575x305x317mm	22 7/8"x12 1/4"x12 3/8"
Unit weight:	1.4kg	3.1lb
CTN QTY.: (4pcs)	6.7kg	14.8lb
CTNS of 20'FT:	2128pcs(532CTNS)	





ROLL TISSUE HOLDER

JZH242

Characteristics:

*ABS engineering plastic shell with aesthetic outfit ane exquisite design which brings decorative characteristic to this towel dispenser.
*Compatible tissue size: length: ≤242mm, wide: ≤75mm. Containable tissue high: ≤ 102mm.

Specifications:

Packing Size:	590x430x640mm	23 1/4"x16 7/8"x25 1/4"
Unit weight:	12kg	26.5lb
CTN QTY.:(12pcs)	15.7kg	34.6lb
CTNS of 20'FT:	2364pcs (197 CTNS)	





TOWEL DISPENSER

ZJH230

Characteristics:

*ABS engineering plastic shell with aesthetic outfit ane exquisite design which brings decorative characteristic to this towel dispenser.
*Compatible tissue size: length: ≤230mm, wide: ≤80mm. Containable tissue high: ≤ 165mm.

Specifications:

Packing Size:	575x445x505mm	22 1/2"x13 1/2"x19 7/8"
Unit weight:	11kg	24.2lb
CTN QTY.:(16pcs)	14.5kg	32lb
CTNS of 20'FT:	3328pcs (208 CTNS)	





TOWEL DISPENSER

ZJH120

Characteristics:

*ABS engineering plastic shell with aesthetic outfit ane exquisite design which brings decorative characteristic to this towel dispenser.
*Compatible tissue size: length: ⩽120mm, wide: ⩽95mm. Containable tissue high: ⩽ 240mm.

Specifications:

Packing Size:	685x545x335mm	17 3/8"x13 7/8"x8 1/2"
Unit weight:	9.3kg	20.5lb
CTN QTY.:(15pcs)	12.3kg	27lb
CTNS of 20'FT:	3570pcs (238 CTNS)	





ROLL TISSUE HOLDER

JZH210W

Characteristics:

*Quality grade 304 stainless steel 22guage (0.8mm)
*Two rollers / idlers, only 1 roll is accessible at a time
*Guide rails for rollers / idlers
*lockable, no more toilet roll theft

Specifications:

Packing Size:	595x320x300mm	23 3/8"x12 5/8"x11 7/8"
Unit weight:	2.1kg	4.6lb
CTN QTY.:(8pcs)	18.5kg	41lb
CTNS of 20'FT:	3528pcs (441 CTNS)	



PAPER TOWEL DISPENSER

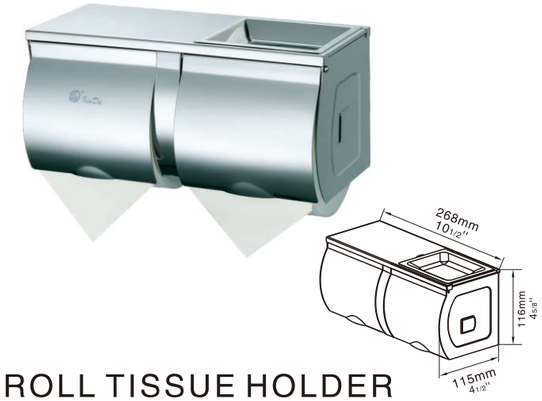

ROLL TISSUE HOLDER

JZH210W1

Characteristics:

*Available in satin stainless steel or polished finish, see options
*Quality grade 304 stainless steel 22guage (0.8mm)

Specifications:

Packing Size:	507x290x395mm	20 3/4"x11 3/8"x15 1/2"
Unit weight:	1kg	2.2lb
CTN QTY.:(12pcs)	14kg	31lb
CTNS of 20'FT:	6336pcs (528 CTNS)	

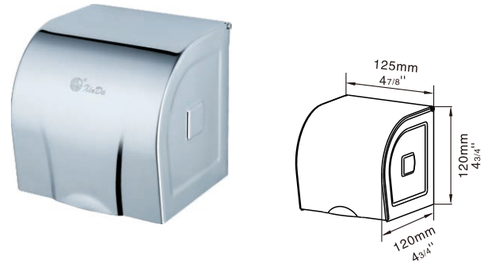

ROLL TISSUE HOLDER

JZH10W1

Characteristics:

*Available in satin stainless steel or polished finish, see options
*Quality grade 304 stainless steel 22guage (0.8mm)

Specifications:

Packing Size:	527x280x416mm	20 3/4"x11"x16 3/8"
Unit weight:	0.5kg	1.1lb
CTN QTY.:(24pcs)	15.2kg	33.5lb
CTNS of 20'FT:	10560pcs (440 CTNS)	





ROLL TISSUE HOLDER

JZH10W2

Characteristic:

*Available in satin stainless steel or polished finish, see options
*Quality grade 304 stainless steel 22guage (0.8mm)

Specifications:

Packing Size:	527x280x416mm	20 3/4"x11"x16 3/8"
Unit weight:	0.5kg	1.1lb
CTN QTY.:(24pcs)	15.2kg	33.5lb
CTNS of 20'FT:	10560pcs (440 CTNS)	





ROLL TISSUE HOLDER

JZH10W3

Characteristic:

*Available in satin stainless steel or polished finish, see options
*Quality grade 304 stainless steel 22guage (0.8mm)

Specifications:

Packing Size:	507x290x395mm	20 3/4"x11 3/8"x15 1/2"
Unit weight:	0.5kg	1.1lb
Package:(24pcs)	14.5kg	32lb
CTNS of 20'FT:	12672pcs (528 CTNS)	

PAPER TOWEL DISPENSER



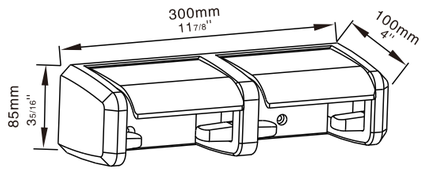

ROLL TISSUE HOLDER

JZH212W1

Characteristics:

*Maximum roll size:Ø120mm, W 115mm

Specifications:

Packing Size:	630x335x580mm	24 3/4"x13 1/8"x22 3/4"
Unit weight:	0.4kg	0.8lb
CTN QTY.:(36pcs)	17.8kg	39.2lb
CTNS of 20'FT:	9072pcs (252 CTNS)	





ROLL TISSUE HOLDER

JZH12W1

Characteristics:

*Maximum roll size:Ø120mm, W 115mm

Specifications:

Packing Size:	525x290x450mm	20 3/4"x11 3/8"x17 7/8"
Unit weight:	0.2kg	0.4lb
CTN QTY.:(36pcs)	10.8kg	23.8lb
CTNS of 20'FT:	15840pcs (440 CTNS)	





ROLL TISSUE HOLDER

JZH10N1

Characteristic:

*Available in satin stainless steel or polished finish, see options
*Quality grade 304 stainless steel 22guage (0.8mm)
*Recessed design

Specifications:

Packing Size:	488x352x405mm	19 1/4"x13 7/8"x15 7/8"
Unit weight:	0.5kg	1.1lb
CTN QTY.:(24pcs)	15.4kg	34lb
CTNS of 20'FT:	8640pcs (360 CTNS)	





ROLL TISSUE HOLDER

JZH10N2

Characteristic:

*Available in satin stainless steel or polished finish, see options
*Quality grade 304 stainless steel 22guage (0.8mm)
*Recessed design

Specifications:

Packing Size:	528x327x548mm	20 7/8"x12 7/8"x21 5/8"
Unit weight:	0.7kg	1.6lb
CTN QTY.:(24pcs)	20.3kg	44.8lb
CTNS of 20'FT:	7392pcs (308 CTNS)	

SOAP DISPENSER





AUTO SOAP DISPENSER

ZYQ100K

Characteristics:

* Beautiful and durable stainless steel shell.
* Digital circuit control with strong anti-interference ability.
* AC+DC power supply, low energy consumption to ensure long time using.
* Infrared automatic sensing,to prevent malfunction.
* Suitable for any kinds of washing solutions, such as shampoo, body lotion,etc.
* Display the patterns of full, liquid and liquid-deficient according to the liquid position in the bottle.

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	880mL	880mL
Dose:	1mL	1mL
Packing Size:	525x310x330mm	20 5/8"x12 1/4"x13"
Unit weight:	0.9kg	2lb
CTN QTY.:(12pcs)	12.4kg	27.3lb
CTNS of 20'FT:	6888pcs(574CTNS)	





AUTO SOAP DISPENSER

ZYQ110K-H

Characteristics:

*Touch free, sensor technology
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	570x325x370mm	22 3/8"x12 7/8"x14 1/2"
Unit weight:	22kg	48.5lb
CTN QTY.:(12pcs)	25.4kg	56lb
CTNS of 20'FT:	5184pcs (432 CTNS)	





AUTO SOAP DISPENSER

ZYQ110K-R

Characteristics:

*Touch free, sensor technology
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	570x325x370mm	22 3/8"x12 3/4"x14 1/2"
Unit weight:	1.5kg	3.3lb
CTN QTY.:(12pcs)	20.7kg	45.6lb
CTNS of 20'FT:	5184pcs (432 CTNS)	45.6lb





AUTO SOAP DISPENSER

ZYQ210K-R

Characteristics:

*Quality stainless steel construction
*Touch free, sensor technology
*Sizeable 2 Ltr cartridge

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6) 4x1.5V(LR6)	DC4x1.5V(LR6) 4x1.5V(LR6)
Capacity:	2000mL	2000mL
Dose:	1mL	1mL
Packing Size:	427x410x360mm	16 3/4"x16 1/8"x14 1/8"
Unit weight:	2kg	4.4lb
CTN QTY.:(6pcs)	14kg	30.8lb
CTNS of 20'FT:	2880pcs (480 CTNS)	





AUTO SOAP DISPENSER
ZYQ210K

Characteristics:

*Quality stainless steel construction
*Touch free, sensor technology
*Sizeable 2 Ltr cartridge

Motion voltage(Optional):AC100–240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6) 4x1.5V(LR6)	DC4x1.5V(LR6) 4x1.5V(LR6)
Capacity:	2000mL	2000mL
Dose:	1mL	1mL
Packing Size:	427x410x360mm	16 3/4"x16 1/8"x14 1/8"
Unit weight:	2kg	4.4lb
CTN QTY.:(6pcs)	14kg	30.8lb
CTNS of 20'FT:	2520pcs (420 CTNS)	





TOUCH SOAP DISPENSER
ZYQ180

Characteristics:

*Quality stainless steel construction
*Manual push button operation
*Easy to refill
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Capacity:	1800mL	1800mL
Dose:	1mL	1mL
Packing Size:	523x305x452mm	20 5/8"x12"x17 7/8"
Unit weight:	0.7kg	1.5lb
CTN QTY.:(16pcs)	13kg	28.5lb
CTNS of 20'FT:	6160pcs (385 CTNS)	





TOUCH SOAP DISPENSER
ZYQ82

Characteristics:

*Quality stainless steel construction
*Wall fixing bracket
*Discreet liquid viewing window
*Manual push button operation
*Non–drip pump mechanism
*Easy to refill
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Capacity:	820mL	820mL
Dose:	1mL	1mL
Packing Size:	515x357x365mm	20 1/4"x14"x14 3/8"
Unit weight:	0.4kg	0.9lb
CTN QTY.:(30pcs)	14.9kg	32.8lb
CTNS of 20'FT:	11880pcs (396 CTNS)	





AUTO SOAP DISPENSER
ZYQ120

Characteristics:

*Quality stainless steel construction
*Wall fixing bracket
*Discreet liqud viewing window
*Touch free, sensor technology
*Non–drip pump mechanism
*Easy to refill
*Batteries powered, low battery indicator
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1200mL	1200mL
Dose:	1mL	1mL
Packing Size:	450x310x452mm	17 5/8"x12 1/4"x17 7/8"
Unit weight:	1kg	2.2lb
CTN QTY.:(16pcs)	17.5kg	38.5lb
CTNS of 20'FT:	7600pcs (475 CTNS)	





AUTO SOAP DISPENSER

ZYQ120-Z(Drop type)

PMQ120-P(Foam type)

Characteristics:

*Imported stainless steel shell, strong and durable.
*Sensing once, release liqud once, a variety of liquid volume free to choose.
*With locking design of the upper and lower doors, to prevent stealing.

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1200mL	1200mL
Dose:	0.5–2.5mL	0.5–2.5mL
Packing Size:	450x310x452mm	17 5/8"x12 1/4"x17 7/8"
Unit weight:	0.9kg	2lb
CTN QTY.:(16pcs)	16.7kg	36.8lb
CTNS of 20'FT:	7600pcs(475 CTNS)	





AUTO SOAP DISPENSER

ZYQ210

Characteristics:

*Touch free, sensor technology
*Sizeable 2Ltr cartridge

Specifications:

Motion voltage(Optional):AC100–240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6) 4x1.5V(LR6)	DC4x1.5V(LR6) 4x1.5V(LR6)
Capacity:	2000mL	2000mL
Dose:	1mL	1mL
Packing Size:	425x400x347mm	16 3/4"x15 3/4"x13 3/4"
Unit weight:	1.4kg	3.1lb
CTN QTY.:(6pcs)	10.5kg	23.1lb
CTNS of 20'FT:	2520pcs (420 CTNS)	





AUTO SOAP DISPENSER

ZYQ50A(Drop type) **PMQ50A**(Foam type)

Characteristics:

* Intelligent digital circuit control, infrared induction, strong anti-interference ability
* Unique liquid and power consumption warning function
* Powered by 4 x 1.5VLR6 batteries, low energy consumption, ensure long-term useing
* Spray angle can range from -20 to 45 degrees, 5 level regulation, 1.5ml, 2ml, 28mL continuous liquid output.
* Unique design, fine atomization. Suitable for all kinds of disinfectant and liquid medicine
* With mobile metal support, no need to wall installation, suitable for various occasions

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	500mL	500mL
Dose:	1–2mL/0.5–1.5	1–2mL/0.5–1.5
Packing Size:	515x515x465mm	20 1/4"x20 1/4"x18 3/8"
Unit weight:	0.7kg	1.5lb
CTN QTY.:(18pcs)	19.8kg	43.6lb
CTNS of 20'FT:	3960pcs(220CTNS)	

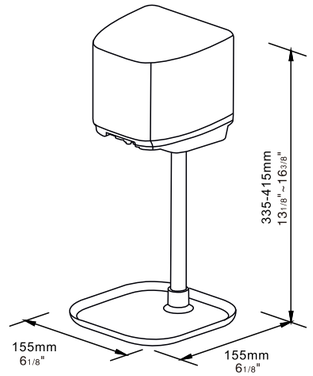





AUTO SOAP DISPENSER

ZYQ50B(Drop type) **PMQ50B**(Foam type)

Characteristics:

* Intelligent digital circuit control, infrared induction, strong anti-interference ability
* Unique liquid and power consumption warning function
* Powered by 4 x 1.5VLR6 batteries, low energy consumption, ensuring long-term use
* Spray angle can range from -20 to 45 degrees, 5 level regulation, 1.5ml, 2ml, 28mL continuous liquid output.
* Unique design, fine atomization. Suitable for all kinds of disinfectant and liquid medicine

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	500mL	500mL
Dose:	1–2mL/0.5–1.5	1–2mL/0.5–1.5
Packing Size:	440x435x430mm	17 1/4"x17 1/8"x16 7/8"
Unit weight:	0.57kg	1.2lb
CTN QTY.:(27pcs)	18.8kg	41lb
CTNS of 20'FT:	7020pcs(390CTNS)	



AUTO SOAP DISPENSER

ZYQ50

Characteristics:

*Touch free, sensor technology
*Non–drip pump mechanism
*Easy to refill
*Batteries powered, low battery indicator
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	500mL	500mL
Dose:	1mL	1mL
Packing Size:	450x410x380mm	17 3/4"x16 1/8"x15"
Unit weight:	0.45kg	1lb
CTN QTY.:(27pcs)	14.7kg	32.4lb
CTNS of 20'FT:	11340pcs (420 CTNS)	







AUTO SOAP DISPENSER

ZYQ80

Characteristics:

*Touch free, sensor technology
*Non–drip pump mechanism
*Easy to refill
*Batteries powered, low battery indicator
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	800mL	800mL
Dose:	1mL	1mL
Packing Size:	540x272x367mm	21 1/8"x10 3/4"x14 3/8"
Unit weight:	0.6kg	1.3lb
CTN QTY.:(16pcs)	11kg	24lb
CTNS of 20'FT:	8064pcs (504 CTNS)	



AUTO SOAP DISPENSER

ZYQ-883

Characteristics:

*Touch free, sensor technology
*Non–drip pump mechanism
*Easy to refill
*Batteries powered, low battery indicator
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	450mL	450mL
Dose:	1mL	1mL
Packing Size :	610x350x340mm	24"x13 7/8"x13 3/8"
Unit weight:	0.5kg	1.1lb
CTN QTY.:(18pcs)	11kg	24lb
CTNS of 20'FT:	6804pcs (378 CTNS)	







AUTO SOAP DISPENSER
ZYQ883A

Characteristics:

*Touch free, sensor technology
*Non-drip pump mechanism
*Easy to refill
*Batteries powered, low battery indicator
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	450mL	450mL
Dose:	1mL	1mL
Packing Size :	500x360x433mm	19 5/8"x14 1/8"x17"
Unit weight:	0.8kg	1.8lb
CTN QTY.:(12pcs)	10.4kg	22.9lb
CTNS of 20'FT:	3960pcs (330 CTNS)	





AUTO SOAP DISPENSER
ZYQ-110

Characteristics:

*Touch free, sensor technology
*Stylish liquid viewing window
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Dose:	1mL	1mL
Packing Size:	510x305x380mm	20"x12"x15"
Unit weight:	0.7kg	1.5lb
CTN QTY.:(12pcs)	10.7kg	23.6lb
CTNS of 20'FT:	5544pcs (462 CTNS)	





AUTO SOAP DISPENSER
ZYQ110B

Characteristics:

*Be controlled by digital circuit with infrared sensor and battery supplied. it has good anti-interference ability.
*With infrared sensor, it dispenses liquid disinfectant automatically that can avoid hand touch and prevent cross-infection.
*Low energy consumption,long termuse.
*Intelligent control induction device, automatically shut down after 30 seconds of continuous work, to prevent continuous work due to false induction.
*Automatic continuous spray function, when continuous induction, the dispenser will spray once every 3 seconds, continuous spraying will stop automatically after 10 times splaying, and will continue working after re-sensing
*It can put on the table or hanging on the wall

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	450x450x430mm	17 3/4"x17 3/4"x17"
Unit weight:	1kg	2.2 lb
CTN QTY.:(9pcs)	11.7kg	25.7 lb
CTNS of 20'FT:	2925pcs (325CTNS)	





AUTO SOAP DISPENSER
ZYQ110-2-Z(Drop type) **ZYQ110-2-P**(Foam type)

Characteristics:

*Intelligent program control, infrared sensor automatic liquid discharge, to avoid contact with hands and prevent cross-infection.
*Large liquid loading capacity, maximum capacity up to 1100ml, constant liquid output, with 3 levels liquid volume adjustment improves the washing efficiency.

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	545x305x370mm	21 1/2"x12"x14 1/2"
Unit weight:	0.75kg	1.7lb
CTN QTY.:(12pcs)	11.5kg	25.3lb
CTNS of 20'FT:	5760pcs (480 CTNS)	





AUTO SOAP DISPENSER

ZYQ110A

Characteristics:

*Touch free, sensor technology
*Stylish sanitizer viewing window
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity
*With movable metal holder which no need the wall-installation,it's suitable for public areas

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	612x315x138mm	24"x12 3/8"x5 3/8"
Unit weight:	2.9kg	6.4lb
CTN QTY.:(1pc)	3.6kg	7.9lb
CTNS of 20'FT:	1122pcs (1122CTNS)	

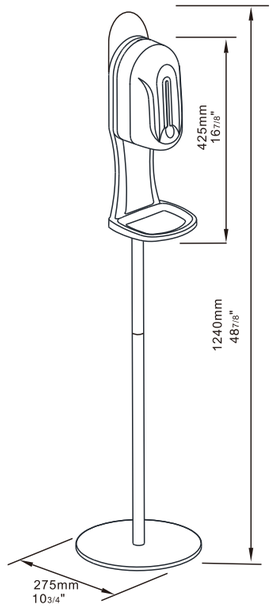






AUTO SOAP DISPENSER



AUTO SOAP DISPENSER

ZYQ110A1

Characteristics:

*Touch free, sensor technology
*Stylish sanitizer viewing window
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity
*With movable metal holder which no need the wall-installation,it's suitable for public areas

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	668x383x140mm	26 1/4"x15"x5 1/2"
Unit weight:	3.8kg	8.4lb
CTN QTY.:(1pc)	4.7kg	10.4lb
CTNS of 20'FT:	867pcs (867CTNS)	

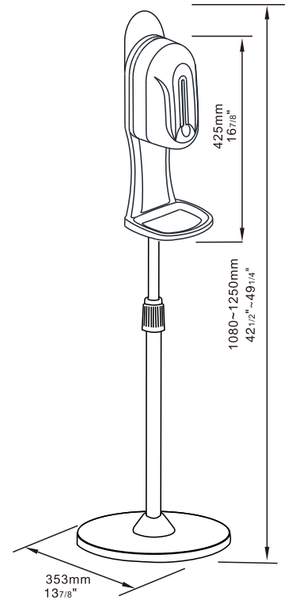






TOUCH SOAP DISPENSER

ZYQ100(Drop type) **ZYQ100P**(Foam type)

Characteristics:

*Chemical resistant ,transparent AS plastic cartridge
*White & silver (powder coating) are available
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted
*Lockable and theft deterred
*ZYQ100P touch for foam soap

Specifications:

Capacity:	1000mL	1000mL
Dose:	1mL	1mL
Packing Size:	525x380x445mm	20 11/16"x14 15/16"x17 1/2"
Unit weight:	0.4kg	0.9lb
CTN QTY.:(24pcs)	12.4kg	27.3lb
CTNS of 20'FT:	7920pcs (330 CTNS)	



TOUCH SOAP DISPENSER

ZYQ39(Drop type) **ZYQ39P**(Foam type)

Characteristics:

*Chemical resistant transparent PC plastic cartridge
*White & silver (powder coating) are available
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted
*Lockable and theft deterred
*ZYQ39P touch for foam soap

Specifications:

Capacity:	390mL	390mL
Dose:	1mL	1mL
Packing Size:	415x310x420mm	16 1/4"x12 1/8"x16 1/2"
Unit weight:	0.3kg	0.7lb
CTN QTY.:(18pcs)	7.5kg	16.5lb
CTNS of 20'FT:	8820pcs (490 CTNS)	





AUTO SOAP DISPENSER



TOUCH SOAP DISPENSER

ZYQ130(Drop type) **ZYQ130P**(Foam type)

Characteristics:

*Chemical resistant transparent AS plastic cartridge
*White & silver (powder coating) are available
*Push button convenience, pump pre–measures correct amount each time
*Wall mounted
*Lockable and theft deterred
*ZYQ130P touch for foam soap

Specifications:

Capacity:	1300mL	1300mL
Dose:	1mL	1mL
Packing Size:	450x405x410(mm)	17 3/4"x16"x16 1/8"
Unit weight:	0.4kg	0.9lb
CTN QTY.:(18pcs)	10.5kg	23lb
CTNS of 20'FT:	6300pcs (350 CTNS)	



TOUCH SOAP DISPENSER

ZYQ-138

Characteristics:

*ABS plastic construction available in white & silver (powder coating)
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted, easy assemble to a multiple unit
*Lockable and theft deterred

Specifications:

Capacity:	380mL	380mL
Dose:	1mL	1mL
Packing Size:	520x282x422mm	20 1/2"x11 1/8"x16 5/8"
Unit weight:	0.2kg	0.4lb
CTN QTY.:(30pcs)	9.5kg	21lb
CTNS of 20'FT:	13200pcs (440 CTNS)	





TOUCH SOAP DISPENSER

ZYQ-138S



Characteristics:

*ABS plastic construction available in white & silver (powder coating)
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted, easy assemble to a multiple unit
*Lockable and theft deterred

Specifications:

Capacity:	380mLx2	380mLx2
Dose:	1mL	1mL
Packing Size :	420x352x420mm	16 1/2"x13 7/8"x16 1/2"
Unit Weight:	0.5kg	1.1lb
CTN QTY.:(16pcs)	10.3kg	22.7lb
CTNS of 20'FT:	6720pcs (420 CTNS)	







TOUCH SOAP DISPENSER

ZYQ25

Characteristics:

*ABS plastic construction available in white & silver (powder coating)
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted, easy to assemble a multiple unit
*Lockable and theft deterred

Specifications:

Capacity:	250mL	250mL
Dose:	1mL	1mL
Packing Size :	440x255x380mm	17 1/4"x10"x15"
Unit weight:	0.17kg	0.4lb
CTN QTY.:(30pcs)	7.5kg	16.5lb
CTNS of 20'FT:	21060pcs (702CTNS)	





TOUCH SOAP DISPENSER

ZYQ25S

Characteristics:

*ABS plastic construction available in white & silver (powder coating)
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted, easy to assemble a multiple unit
*Lockable and theft deterred

Specifications:

Capacity:	250mLx2	250mLx2
Dose:	1mL	1mL
Packing Size :	415x350x380mm	16 1/4"x13 7/8"x15"
Unit weight:	0.35kg	0.8lb
CTN QTY.:(20pcs)	9.5kg	21lb
CTNS of 20'FT:	10080pcs (504CTNS)	





TOUCH SOAP DISPENSER
ZYQ28

Characteristics:

*ABS plastic construction available in white & silver (powder coating)
*Convenience pushing button, pump pre-measures correct amount each time
*Wall mounted, easy to assemble a multiple unit
*Lockable and theft deterred

Specifications:

Capacity:	280mL	280mL
Dose:	1mL	1mL
Packing Size:	530x260x387mm	20 7/8"x10 1/4"x15 1/4"
Unit weight:	0.2kg	0.4lb
CTN QTY.:(48pcs)	12kg	26.5lb
CTNS of 20'FT:	28512pcs (594 CTNS)	





TOUCH SOAP DISPENSER
ZYQ28S

Characteristics:

*ABS plastic construction available in white & silver (powder coating)
*Convenience pushing button, pump pre-measures correct amount each time
*Wall mounted, easy to assemble a multiple unit
*Lockable and theft deterred

Specifications:

Capacity:	280mLx2	280mLx2
Dose:	1mL	1mL
Packing Size:	495x295x387mm	19 1/2"x11 5/8"x15 1/4"
Unit weight:	0.4kg	0.9lb
CTN QTY.:(24pcs)	12.5kg	27.5lb
CTNS of 20'FT:	11808pcs (492CTNS)	





TOUCH SOAP DISPENSER
ZYQ36

Characteristics:

*White ABS plastic construction
*Convenience pushing button, pump pre-measures correct amount each time
*Wall mounted, lockable and theft deterred
*Novel design, suitable for decoration

Specifications:

Capacity:	360mL	360mL
Dose:	1mL	1mL
Packing Size:	535x367x420mm	21"x14 3/8"x16 1/2"
Unit weight:	0.25kg	0.6lb
CTN QTY.:(48pcs)	14.6kg	32.2lb
CTNS of 20'FT:	15840pcs (330 CTNS)	





TOUCH SOAP DISPENSER
ZYQ36S

Characteristics:

*White ABS plastic construction
*Convenience pushing button, pump pre-measures correct amount each time
*Wall mounted, lockable and theft deterred
*Novel design, suitable for decoration

Specifications:

Capacity:	360mLx2	360mLx2
Dose:	1mL	1mL
Packing Size:	550x315x420mm	21 5/8"x12 3/8"x16 1/2"
Unit weight:	0.4kg	0.9lb
CTN QTY.:(24pcs)	12.8kg	28.2lb
CTNS of 20'FT:	8640pcs (360 CTNS)	





TOUCH SOAP DISPENSER
ZYQ37

Characteristics:

*ABS plastic construction available in white & silver (powder coating)
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted, lockable and theft deterred

Specifications:

Capacity:	370mL	370mL
Dose:	1mL	1mL
Packing Size :	490x280x425mm	19 1/4"x11"x16 3/4"
Unit weight:	0.2kg	0.4lb
CTN QTY.:(30pcs)	9kg	20lb
CTNS of 20'FT:	14400pcs (480 CTNS)	





TOUCH SOAP DISPENSER
ZYQ37S

Characteristics:

*ABS plastic construction available in white & silver (powder coating)
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted, lockable and theft deterred

Specifications:

Capacity:	370mLx2	370mLx2
Dose:	1mL	1mL
Packing Size :	415x330x425mm	16 1/4"x13"x16 3/4"
Unit weight:	0.5kg	1.1lb
CTN QTY.:(16pcs)	9.5kg	21lb
CTNS of 20'FT:	7840pcs (490 CTNS)	





TOUCH SOAP DISPENSER
ZYQ40

Characteristics:

*White ABS plastic construction
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted, lockable and theft deterred
*Novel design, suitable for decoration

Specifications:

Capacity:	400mL	400mL
Dose:	1mL	1mL
Packing Size :	560x300x466mm	22"x11 7/8"x18 1/4"
Unit weight:	0.3kg	0.7lb
CTN QTY.:(48pcs)	16kg	35.2lb
CTNS of 20'FT:	18240pcs (380 CTNS)	





TOUCH SOAP DISPENSER
ZYQ40S

Characteristics:

*White ABS plastic construction
*Convenience pushing button, pump pre–measures correct amount each time
*Wall mounted, lockable and theft deterred
*Novel design, suitable for decoration

Specifications:

Capacity:	400mLx2	400mLx2
Dose:	1mL	1mL
Packing Size :	490x300x466mm	19 1/8"x11 7/8"x18 1/4"
Unit weight:	0.6kg	1.3lb
CTN QTY.:(20pcs)	14kg	30.8lb
CTNS of 20'FT:	8400pcs (420 CTNS)	



SANITIZER DISPENSER





SANITIZER DISPENSER
XDQ210K

Characteristics:

*Touch free, sensor technology
*Large volume of sanitizer from single dose, max volume 6ml, min volume 0.5 ml
*Sizeable 2 Ltr cartridge
*Powered by DC adaptor

Specifications:

Motion voltage(Optional):AC100–240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Rated power:	12VA	12VA
Capacity:	2000mL	2000mL
Dose:	0.5~6mL	0.5~6mL
Packing Size :	427x410x360mm	16 3/4"x16 1/8"x14 1/8"
Unit weight:	2.6kg	5.7lb
CTN QTY.:(6pcs)	14.6kg	32.1lb
CTNS of 20'FT:	2520pcs (420CTNS)	





SANITIZER DISPENSER
XDQ210K-R

Characteristics:

*Touch free, sensor technology
*Large volume of sanitizer from single dose, max volume 6ml, min volume 0.5 ml
*Sizeable 2 Ltr cartridge
*Powered by DC adaptor

Specifications:

Motion voltage(Optional):AC100–240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Rated power:	12VA	12VA
Capacity:	2000mL	2000mL
Dose:	0.5~6mL	0.5~6mL
Packing Size :	427x410x360(mm)	16 3/4"x16 1/8"x14 1/8"
Unit weight:	2.6kg	5.7lb
CTN QTY.:(6pcs)	17.3kg	38.1lb
CTNS of 20'FT:	2880pcs (480CTNS)	





SANITIZER DISPENSER
XDQ110K-R

Characteristics:

*Touch free, sensor technology
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Motion voltage(Optional):	AC100-240V~/50/60Hz	
Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	570x325x370(mm)	22 3/8"x12 3/4"x14 1/2"
Unit weight:	1.5kg	3.3lb
CTN QTY.:(12pcs)	20.7kg	45.6lb
CTNS of 20'FT:	5184pcs (432 CTNS)	





SANITIZER DISPENSER
ZYQ120-X

Characteristics:

*Imported stainless steel shell, solid and durable.
*Sensing once, release liquid once, a variety of liquid volume free to choose.
*With locking design of the upper and lower doors, can prevent artificial.

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1200mL	1200mL
Dose:	0.5-2.5mL	0.5-2.5mL
Packing Size:	450x310x452mm	17 5/8"x12 1/4"x17 7/8"
Unit weight:	0.9kg	2lb
CTN QTY.:(16pcs)	16.7kg	36.8lb
CTNS of 20'FT:	7600pcs(475 CTNS)	





SANITIZER DISPENSER
XDQ110

Characteristics:

*Touch free, sensor technology
*Stylish sanitizer viewing window
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity

Specifications:

Motion voltage(Optional):	AC100-240V~/50/60Hz	
Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	510x305x380mm	20"x12"x15"
Unit weight:	0.7kg	1.5lb
CTN QTY.:(12pcs)	10.7kg	23.6lb
CTNS of 20'FT:	5544pcs (462CTNS)	





SANITIZER DISPENSER
XDQ110B

Characteristics:

*It is controlled by digital circuit with infrared sensor and battery supplied. it has good anti-interference ability.
*With infrared sensor, it dispenses liquid disinfectant automatically that can avoid hand touch and prevent cross-infection.
*Low power consuvnption,long use-life.
*Intelligent control induction device, automatically shut down after 30 seconds of continuous work, to prevent false induction.
*Automatic continuous spray function, when continuous induction, the dispenser will spray once every 3 seconds, continuous spraying will stop automatically after 10 times, and will continue working after re-sensing
*It can put on the table or hanging on the wall

Specifications:

Motion voltage(Optional):	AC100-240V~/50/60Hz	
Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	450x450x430mm	17 3/4"x17 3/4"x17"
Unit weight:	1kg	2.2lb
CTN QTY.:(9pcs)	11.7kg	25.7lb
CTNS of 20'FT:	2925pcs (325CTNS)	





SANITIZER DISPENSER

ZYQ110-2-X

Characteristics:

*Intelligent program control, infrared sensor automatic liquid discharge, to avoid contact with hands and prevent cross-infection.
*Large liquid loading capacity, maximum capacity up to 1100ml, constant liquid output, with 3 levels liquid volume adjustment improves the washing efficiency.

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size:	545x305x370mm	21 1/2"x12"x14 1/2"
Unit weight:	0.76kg	1.7lb
CTN QTY.:(12pcs)	11.5kg	25.3lb
CTNS of 20'FT:	5760pcs (480 CTNS)	



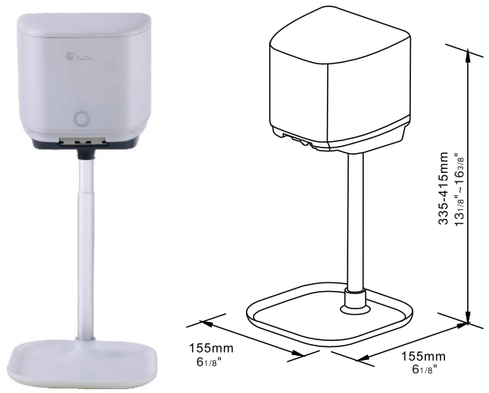

SANITIZER DISPENSER

XDQ50A

Characteristics:

* Intelligent digital circuit control, infrared induction, strong anti-interference ability
* Unique liquid and power consumption warning function
* Powered by 4 x 1.5VLR6 batteries, low energy consumption, ensuring long-term use
* Spray angle can range from -20 to 45 degrees, 5 level regulation, 1.5ml, 2ml, 28ml continuous liquid output.
* Unique design, fine atomization. Suitable for all kinds of disinfectant and liquid medicine
* With mobile metal support, no need to wall installation, suitable for various occasions
* 4 modes: Mode ①: Automatically sprayes every 15 minutes;
  Mode ②: Automatically sprayes every 45 minutes;
  Mode ③: After touching the infrared sensing area, the liquid will automatically discharge once;
  Mode ④: When someone passes the sensing area, the device will automatically spray disinfectant after the user leaves the sensing area for 6 seconds.

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	500mL	500mL
Dose:	1-2mL	1-2mL
Packing Size:	515x515x465mm	20 1/4"x20 1/4"x18 3/8"
Unit weight:	0.7kg	1.5lb
CTN QTY.:(18pcs)	19.8kg	43.6lb
CTNS of 20'FT:	3960pcs(220CTNS)	



SANITIZER DISPENSER

XDQ50B

Characteristics:

* Intelligent digital circuit control, infrared induction, strong anti-interference ability
* Unique liquid and power consumption warning function
* Powered by 4 x 1.5VLR6 batteries, low energy consumption, ensuring long-term use
* Spray angle can range from -20 to 45 degrees, 5 level regulation, 1.5ml, 2ml, 28ml continuous liquid output.
* Unique design, fine atomization. Suitable for all kinds of disinfectant and liquid medicine
* 4 modes: Mode ①: Automatically sprayes every 15 minutes;
  Mode ②: Automatically sprayes every 45 minutes;
  Mode ③: After touching the infrared sensing area, the liquid will automatically discharge once;
  Mode ④: When someone passes the sensing area, the device will automatically spray disinfectant after the user leaves the sensing area for 6 seconds.

Specifications:

Voltage:	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	500mL	500mL
Dose:	1-2mL	1-2mL
Packing Size:	440x435x430mm	17 1/4"x17 1/8"x16 7/8"
Unit weight:	0.57kg	1.2lb
CTN QTY.:(27pcs)	18.8kg	41lb
CTNS of 20'FT:	7020pcs(390CTNS)	





SANITIZER DISPENSER

XDQ210

Characteristics:

*Touch free, sensor technology
*Active nozzle, 4 levels can range from 0° -30°
*Large volume of sanitizer from single dose, max volume 6ml, min volume 0.5 ml
*Sizeable 2 Ltr cartridge
*Powered by DC adaptor

Specifications:

Motion voltage:	AC220V~/50Hz	AC110-120V/60Hz
Voltage:	DC6V	DC6V
Rated power:	12VA	12VA
Capacity:	2000mL	2000mL
Dose:	0.5~6mL	0.5~6mL
Packing Size:	425x400x347(mm)	16 3/4"x15 3/4"x13 3/4"
Unit weight:	2kg	4.4lb
CTN QTY.:(6pcs)	14kg	30.8lb
CTNS of 20'FT:	2520pcs (420CTNS)	





MOVABLE SANITIZER DISPENSER

XDQ210A1

Characteristics:

*Touch free, sensor technology
*Active nozzle, 4 levels from 0'–30"
*Large volume of sanitizer from single dose, max volume 6ml，min volume 0.5 ml
*Sizeable 2 Ltr cartridge
*Powered by DC adaptor

Specifications:

Voltage:	DC 6V（12VA）	DC 6V（12VA）
Capacity:	2000mL	2000mL
Dose:	0.5~6mL	0.5~6mL
Packing Size:	590x480x262mm	23 1/4"x18 1/8"x10 3/8"
Unit weight:	5.9kg	13lb
CTN QTY.:(1pc)	7.5kg	16.5lb
CTNS of 20'FT:	405pcs (405CTNS)	

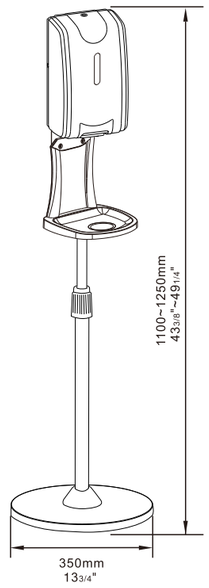

SANITIZER DISPENSER





SANITIZER DISPENSER

XDQ110A

Characteristics:

*Touch free, sensor technology
*Stylish sanitizer viewing window
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity
*With movable metal holder which no need the wall-installation, suitable for public areas

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size :	612x315x138mm	24"x12 3/8"x5 3/8"
Unit weight:	2.9kg	6.4lb
CTN QTY.:(1pc)	3.6kg	7.9lb
CTNS of 20'FT:	1122pcs (1122CTNS)	

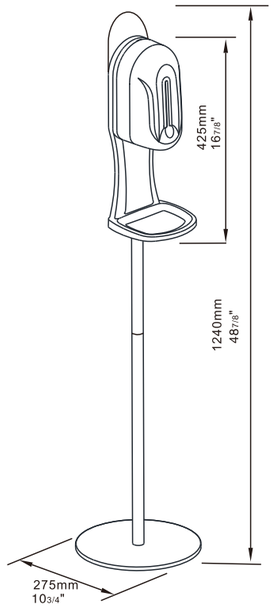








SANITIZER DISPENSER

XDQ110A1

Characteristics:

*Touch free, sensor technology
*Stylish sanitizer viewing window
*Non-drip pump mechanism
*Easy to refill
*3 seconds interval for two doses, max 10 doses for single operation
*Valuable locking system to deter theft and maintain content integrity
*With movable metal holder which no need the wall-installation,suitable for public areas

Specifications:

Motion voltage(Optional):AC100-240V~/50/60Hz

Voltage(Default):	DC4x1.5V(LR6)	DC4x1.5V(LR6)
Capacity:	1100mL	1100mL
Dose:	1mL	1mL
Packing Size :	668x383x140mm	26 1/4"x15"x5 1/2"
Unit weight:	3.8kg	8.4lb
CTN QTY.:(1pc)	4.7kg	10.4lb
CTNS of 20'FT:	867pcs (867CTNS)	

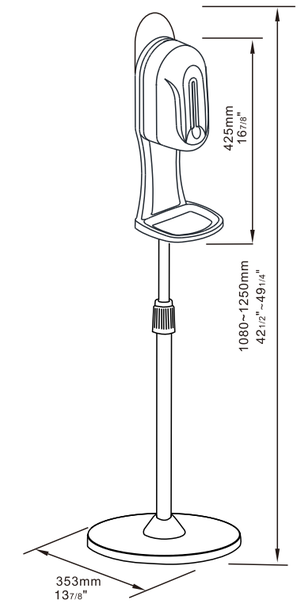




HAIR DRYER





HAIR DRYER

GDC150-15 **GDC150-15A**

Characteristics:

*18 minutes automatic safety timer, 17 min. warm air and 1 min. cool air
*Automatic switching on when removing the handgrip from its holder
*Constant temperature between 40°C–80°C
*5 heat settings, 60°C default air temperature
*LCD screen with LED background light
*Extendable hose (up to 1.80m)
*Designed for the hotel bathroom
*GDC150–15 includes shaver socket

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1500W	1500W
Current:	6.5A	13.6A
Anti–electric–shock:	⧈	⧈
Degree of protection:	IP24	IP24
Air volume:	87m³/h	87m³/h
Air velocity:	17m/s	17m/s
Packing Size:	495x445x380mm	19 1/2"x17 1/2"x15"
Unit weight:	2.6kg	5.7lb (GDC150–15)
	2kg	4.4lb (GDC150–15A)
CTN QTY.:(6pcs)	18.8kg	41.4lb(GDC150–15)
	15.6kg	34.4lb(GDC150–15A)
CTNS of 20'FT:	1980pcs (330 CTNS)	





HAIR DRYER

GDC100-15 **GDC100-15A**

Characteristics:

*15 minutes automatic safety timer
*Automatic switching on when removing the handgrip from its holder
*Air temperature settings
*Extendable hose (up to 1.80m)
*Designed for the hotel bathroom
*GDC100–15 includes shaver socket



Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1000W	1000W
Current:	4.3A	9.1A
Anti–electric–shock:	□	□
Degree of protection:	IP24	IP24
Air volume:	87m³/h	87m³/h
Air velocity:	17m/s	17m/s
Packing Size:	495x445x380mm	19 1/2"x17 1/2"x15"
Unit weight:	2.5kg	5.5lb (GDC100–15)
	1.9kg	4.2lb (GDC100–15A)
CTN QTY.:(6pcs)	18.5kg	40.8lb (GDC100–15)
	15kg	33lb (GDC100–15A)
CTNS of 20'FT:	1980pcs (330 CTNS)	







HAIR DRYER

RCY160-88

Characteristics:

*110,000 rpm high speed motor makes strong wind power, natural wind mode for fast hair drying.
*3 wind temperatures, 3 wind speeds, 9 usage modes for different needs.
*Highly concentrated negative ions are generated during the drying process,making the hair surface smoother.
*The product comes with fused temperature tester and microprocessor. Effective protection of overheating, over current and voltage safety. Making this product more reassuring.
*Defaults to the last using gears (air temperature and air speed)
*Long press the wind temperature button to switch to natural wind mode.
Press the wind temperature button again to switch into original wind temperature mode.
*Turn off the hair dryer, and press the wind speed button for 3 seconds, then turn on the power switch. The hair dryer will enter the cleaning mode. It will stop cleaning after 10 seconds, please turn off the power switch after cleaning.

Specifications:

Voltage:	220V–240V~/50Hz
Rated Power:	1600W
Current:	7.5A
Anti–electric–shock:	□
Air volume:	60m³/h
Air velocity:	62m/s
Packing Size:	530x335x345mm
Unit weight:	8.5kg
CTN QTY.:(16pcs)	15.2kg
CTNS of 20'FT:	7392pcs (462 CTNS)





HAND DRYER





HAIR DRYER

RCY160-88A1

Characteristics:

*110,000 rpm high speed motor makes strong wind power, natural wind mode for fast hair drying.

*3 wind temperatures, 3 wind speeds, 9 usage modes for different needs.

*Highly concentrated negative ions are generated during the drying process, making the hair surface smoother.

*The product comes with fused temperature tester and microprocessor. Effective protection of overheating, over current and voltage safety. Making this product more reassuring.

*Defaults to the last using gears (air temperature and air speed)

*Long press the wind temperature button to switch to natural wind mode. Press the wind temperature button again to switch into original wind temperature mode.

*Turn off the hair dryer, and press the wind speed button for 3 seconds, then turn on the power switch. The hair dryer will enter the cleaning mode. It will stop cleaning after 10 seconds, please turn off the power switch after cleaning.

*Auto retractable wire reel is an effective solution to solve manage and storage the wire.

Specifications:

Voltage:	220V~50Hz
Rated Power:	1600W
Current:	7.5A
Anti-electric-shock:	⊡
Air volume:	60m³/h
Air velocity:	62m/s
Packing Size:	600x275x355mm
Unit weight:	10. 3kg
CTN QTY.:(12pcs)	12.6kg
CTNS of 20'FT:	5832pcs (486 CTNS)







RCY180-22A1



RCY180-22A



RCY180-22B

HAIR DRYER

RCY180-22series

Characteristics:

* 1800W high performance, high speed motor. Powerful wind blowing brings a shorter hair drying period to save your precious time.

* The only switch button makes the operation easily and conveniently. Three different temperature settings meet different need for hair drying.

* The T shape appearance design, induction handle creates an intelligent product with automatic switch for your comfortable using experience.

* Ten million level of negative ions can infiltrate into the hair, tame the frizzy hair to makes it bright and smooth.

* The isolated outer shell wind nozzle with magnetic suction ring can lower the wind nozzle surface temperature while hair drying process to reduce the risk of getting scald.

* Double layer protection for air inlet design can effectivly prevent the hair being sucked into the hair dryer.

* Innovative U shape heating unit brings uniform warmth and comfortable feeling, which is for taking good care of your hair.

* Double anti-overheating protection: temperature controller+ temperature fuse, morover, the air forced cooling system is used for preventing overheat. Those protections are creating a safty hair drying experience.

Specifications:

Voltage:	220V~50Hz
Rated Power:	1800W
Current:	7.2A
Anti-electric-shock:	⧈
Air volume:	66m^3/h
Air velocity:	14m/s
Packing Size:	550x270x430mm
Unit weight:	10. 2kg
CTN QTY.:(18pcs)	12.7kg
CTNS of 20'FT:	7560pcs (420 CTNS)





HAIR DRYER
RCY180-22A2

Characteristics:

* 1800W high performance, high speed motor. Powerful wind blowing brings a shorter hair drying period to save your precious time.

* The only switch button makes the operation easily and conveniently. Three different temperature settings meet different need for hair drying.

* The T shape appearance design, induction handle creates an intelligent product with automatic switch for your comfortable using experience.
* Ten million level of negative ions can infiltrate into the hair, tame the frizzy hair to makes it bright and smooth.
* The isolated outer shell wind nozzle with magnetic suction ring can lower the wind nozzle surface temperature while hair drying process to reduce the risk of getting scald.
* Double layer protection for air inlet design can effectivly prevent the hair being sucked into the hair dryer.
* Innovative U shape heating unit brings uniform warmth and comfortable feeling, which is for taking good care of your hair.
* Double anti-overheating protection: temperature controller+ temperature fuse, morover, the air forced cooling system is used for preventing overheat. Those protections are creating a safty hair drying experience.
* Handle sensor switch setting
*To solve manage and storage the wire.



Specifications:

Voltage:	220V~50Hz
Rated Power:	1800W
Current:	8.2A
Anti-electric-shock:	⊡
Air volume:	66m³/h
Air velocity:	14m/s
Packing Size :	550x275x370mm
Unit weight:	10. 3kg
CTN QTY.:(12pcs)	12.5kg
CTNS of 20'FT:	6048pcs (504 CTNS)





HAIR DRYER
RCY118-19A

Characteristics:

*I convenient to carry and store with its folding design.
*There are three types of temperatures for you to choose, cool air, warm air& hot air to choose .
*There's a micro switch on the handle, you can turn on and off the hair dryer by pressing such micro switch.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	1200W	1000W
Current:	5.2A	9.1A
Anti-electric-shock:	⊡	⊡
Air volume:	81m³/h	81m³/h
Air velocity:	14m/s	14m/s
Packing Size :	505x220x458mm	19 3/4"x8 5/8"x18"
Unit weight:	0.3kg	0.7lb
CTN QTY.:(18pcs)	9.4kg	20.7lb
CTNS of 20'FT:	9900pcs (550 CTNS)	





HAIR DRYER
RCY100-23A

Characteristics:

*2 air temperature/air flow settings
*On/Off push button
*Concentrator nozzle
*Wall holder
*On/Off safety switch

Specifications:

Voltage:	220V/230V~/50Hz	110-120V/60Hz
Rated Power:	1200W/1350W	800/1000W
Current:	5.4A/5.8A	7.3/8.3A
Anti-electric-shock:	⊡	⊡
Air volume:	73m³/h	73m³/h
Air velocity:	13m/s	13m/s
Packing Size :	530x290x475mm	21"x11 3/8"x18 3/4"
Unit weight:	0.6kg	1.3lb
CTN QTY.:(18pcs)	13.6kg	30lb
CTNS of 20'FT:	7920pcs (440 CTNS)	





HAIR DRYER
RCY120-18A

Characteristics:

*2 air temperature/air flow settings
*On/Off push button
*Wall holder
*On/Off safety switch with pilot lamp

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1200W	1000W
Current:	5.2A	9.1A
Anti–electric–shock:	□	□
Air volume:	78m³/h	78m³/h
Air velocity:	14m/s	14m/s
Packing Size :	555x265x422mm	22"x10 3/8"x16 5/8"
Unit weight:	1.3kg	2.9lb
CTN QTY.:(12pcs)	18.2kg	40.1lb
CTNS of 20'FT:	5280pcs (440 CTNS)	





HAIR DRYER
RCY120-18A1

Characteristics:

*2 air temperature/air flow settings
*On/Off push button
*Wall holder
*On/Off safety switch with pilot lamp

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1200W	1000W
Current:	5.2A	9.1A
Anti–electric–shock:	□	□
Air volume:	78m³/h	78m³/h
Air velocity:	14m/s	14m/s
Packing Size :	555x265x422mm	22"x10 3/8"x16 5/8"
Unit weight:	0.7kg	1.5lb
CTN QTY.:(12pcs)	10.5kg	23.1lb
CTNS of 20'FT:	5280pcs (440 CTNS)	





HAIR DRYER
RCY120-18B **RCY120-18B1**

Characteristics:

*2 air temperature/air flow settings
*On/Off push button
*Wall holder
*On/Off safety switch

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1200W	1000W
Current:	5.2A	9.1A
Anti–electric–shock:	□	□
Air volume:	78m³/h	78m³/h
Air velocity:	14m/s	14m/s
Packing Size :	582x225x412mm	23"x8 3/4"x16 1/8"
Unit weight:	1.4kg (RCY120–18B)	3.1lb
	0.8kg (RCY120–18B1)	1.8lb
CTN QTY.:(12pcs)	18.5kg (RCY120–18B)	40.8lb
	12kg (RCY120–18B1)	26.4lb
CTNS of 20'FT:	6240pcs (520 CTNS)	





HAIR DRYER
RCY120-18C

Characteristics:

*2 air temperature/air flow settings
*On/Off push button
*Wall holder
*On/Off safety switch

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1200W	1000W
Current:	5.2A	9.1A
Anti–electric–shock:	□	□
Air volume:	78m³/h	78m³/h
Air velocity:	14m/s	14m/s
Packing Size :	505x302x460mm	20"x12"x18 1/8"
Unit weight:	0.7kg	1.5lb
CTN QTY.:(18pcs)	15kg	33.5lb
CTNS of 20'FT:	6930pcs (385 CTNS)	



HAND DRYER





RCY120–20B　　RCY120–20B1

HAIR DRYER

RCY120-20A　**RCY120-20A1**

Characteristics:

*2 air temperature/air flow settings
*On/Off push button
*Wall holder
*On/Off safety switch with pilot lamp

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1200W	1200W
Current:	5.2A	11A
Anti–electric–shock:	□	□
Air volume:	88m³/h	88m³/h
Air velocity:	14m/s	14m/s
Packing Size :	585x247x440mm	23"x9 3/4"x17 1/4"
Unit weight:	1.4kg (RCY120–20A)	3.1lb
	0.9kg (RCY120–20A1)	2lb
CTN QTY.:(12pcs)	19.5kg (RCY120–20A)	43lb
	13.2kg (RCY120–20A1)	29.1lb
CTNS of 20'FT:	5520pcs (460 CTNS)	



HAIR DRYER

RCY120-20B　**RCY120-20B1**

Characteristics:

*2 air temperature/air flow settings
*On/Off push button
*Wall holder
*On/Off safety switch with pilot lamp

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	1200W	1200W
Current:	5.2A	11A
Anti–electric–shock:	□	□
Air volume:	88m³/h	88m³/h
Air velocity:	14m/s	14m/s
Packing Size :	585x274x420mm	23"x10 3/4"x16 1/2"
Unit weight:	1.4kg (RCY120–20B)	3.1lb
	0.8kg (RCY120–20B1)	1.8lb
CTN QTY.:(12pcs)	18.9kg (RCY120–20B)	41.6lb
	12.7kg (RCY120–20B1)	28lb
CTNS of 20'FT:	5520pcs (460 CTNS)	





AUTOMATIC PERFUME DISPENSER

AUTOMATIC PERFUME DISPENSER



PXQ-188 PXQ-188A PXQ-188B

AUTOMATIC PERFUME DISPENSER

PXQ-188 Series

Characteristics:

*ABS strong construction, discreet white finish
*Easy aerosol replacement
*Lockable to prevent aerosol theft
*Sensor technology, three operating choices: 24 hours a day, when sensing light, when sensing darkness
*Suitable for 65mm diameter cans (240 ml to 320 ml)
*PXQ-188: choice of 5–45 min. spray intervals
*PXQ-188A: includes LCD screen; 5/10/20/30/40/60 minutes, 2/4 hours spray intervals; choice of 1–3 shots spray amount
*PXQ-188B: includes remote control; 5/10/20/30/40/60 minutes, 2/4 hours spray intervals; choice of 1–3 shots spray amount

Specifications:

Voltage:	DC2x1.5 V(R20)	DC2x1.5V(R20)
PXQ-188 PXQ-188A		
Packing Size:	515x295x445mm	20 1/4"x11 5/8"x17 1/2"
Unit weight:	0.5kg	1lb
CTN QTY.:(24pcs)	13.7kg	30.2lb
CTNS of 20'FT:	9240pcs (385 CTNS)	
PXQ-188B		
Packing Size:	515x320x445mm	20 1/4"x12 5/8"x17 1/2"
Unit weight:	0.5kg	1.1lb
CTN QTY.:(24pcs)	14.8kg	32.6lb
CTNS of 20'FT:	9240pcs (385 CTNS)	





PXQ-288 PXQ-288A

AUTOMATIC PERFUME DISPENSER

PXQ-288 Series

Characteristics:

*ABS strong construction, discreet white finish
*Easy aerosol replacement
*Lockable to prevent aerosol theft
*Sensor technology, three operating choices: 24 hours a day, when sensing light, when sensing darkness
*Suitable for 65mm diameter cans (240 ml to 320 ml)
*PXQ-288: choice of 5–45 min. spray intervals
*PXQ-288A: includes remote control; 5/10/20/30/40/60 minutes, 2/4 hours spray intervals; choice of 1–3 shots spray amount

Specifications:

Voltage:	DC2x1.5V(R20)	DC2x1.5V(R20)
PXQ-288		
Packing Size:	500x275x275mm	19 3/4"x10 7/8"x10 7/8"
Unit weight:	0.5kg	1.1lb
CTN QTY.:(15pcs)	9kg	20lb
CTNS of 20'FT:	10560pcs (704 CTNS)	
PXQ-288A		
Packing Size:	585X275X275mm	23"x10 7/8"x10 7/8"
Unit weight:	0.52kg	1.2lb
CTN QTY.:(15pcs)	10kg	22lb
CTNS of 20'FT:	10080pcs (672 CTNS)	



AUTOMATIC PERFUME DISPENSER



PXQ388 PXQ388A PXQ388B

AUTOMATIC PERFUME DISPENSER

PXQ388 Series

Characteristics:

*Chemical resistant white polypropylene plastic casing
*Discreet white finish
*Easy aerosol replacement
*Lockable to prevent aerosol theft
*Sensor technology, three operating choices: 24 hours a day, when sensing light, when sensing darkness
*PXQ388: choice of 5–45 min. spray intervals
*PXQ388A: includes LCD screen, choice of 1 min–4 hrs spray intervals; 1–3 shots spray amount; 0–24 hour operation; start/stop time and days of operation (from Monday to Sunday)
*PXQ388B: includes remote control; 5/10/20/30/40/60 minutes, 2/4 hours spray intervals; choice of 1–3 shots spray amount

Specifications:

Voltage:	DC2x1.5V(R20)	DC2x1.5V(R20)
Packing Size:	420x305x555mm	16 1/2"x12"x21 7/8"
PXQ388 PXQ388A		
Unit weight:	0.5kg	1.1lb
CTN QTY.:(24pcs)	14.3kg	31.5lb
CTNS of 20'FT:	9408pcs (392 CTNS)	
PXQ388B		
Unit weight:	0.55kg	1.21lb
CTN QTY.:(24pcs)	15.3kg	33.7lb
CTNS of 20'FT:	9408pcs (392 CTNS)	





PXQ488 PXQ488A PXQ488B

AUTOMATIC PERFUME DISPENSER

PXQ488 Series

Characteristics:

*Chemical resistant white polypropylene plastic casing
*Discreet white finish
*Easy aerosol replacement
*Lockable to prevent aerosol theft
*Sensor technology, three operating choices: 24 hours a day, when sensing light, when sensing darkness
*PXQ488: choice of 5–45 min. spray intervals
*PXQ488A: includes LCD screen, choice of 1 min–4 hrs spray intervals; 1–3 shots spray amount; 0–24 hour operation; start/stop time and days of operation (from Monday to Sunday)
*PXQ488B: includes remote control; 5/10/20/30/40/60 minutes, 2/4 hours spray intervals; choice of 1–3 shots spray amount

Specifications:

Voltage:	DC2x1.5V(R20)	Dc2x1.5V(R20)
Packing Size:	390x330x520mm	15 1/4"x13"x20 1/2"
PXQ488 PXQ488A		
Unit weight:	0.51kg	1.1lb
CTN QTY.:(24pcs)	15.9kg	35lb
CTNS of 20'FT:	10080pcs (420 CTNS)	
PXQ488B		
Unit weight:	0.55kg	1.2lb
CTN QTY.:(24pcs)	16.5kg	36.4lb
CTNS of 20'FT:	10080pcs (420 CTNS)	





MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES



Hand touch control panel



LED light



With pet mist removal function



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG241021KS

Characteristics:

*Double–hinged doors (left & right opening);
* 5mm high–definition eco–certified silver mirror;
* LED light panel, 6000K color temperature;
* Single touch switch with 30W high–safety IP67 & 3C–certified waterproof power supply;
* Material: Black stainless steel frame;
*Accessories:
– Recessed sensor soap dispenser (engineering plastic, smart sensor system);
– Stainless steel recessed tissue box;

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	30W	30W
Packing Size:	1270x 1170 x 200mm	50"x 50"x 7 7/8"
Unit weight:	42.8kg	94lb
CTN QTY.:(1pc)	63kg	139lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG1470-Z

Characteristics:

*5mm high–definition eco–friendly silver mirror;
* Stainless steel frame with antique bronze paint finish;
*Decorative exterior front mirror light, 3300K color temperature;
*High–safety IP67 waterproof power supply.

Specifications:

Voltage:	220V–240V~/50Hz	110–120V/60Hz
Rated Power:	45W	45W
Packing Size:	1540x 820 x 120mm	60 1/2"x 32 1/4"x 4 3/4"
Unit weight:	16.6kg	36.6lb
CTN QTY.:(1pc)	30kg	66lb

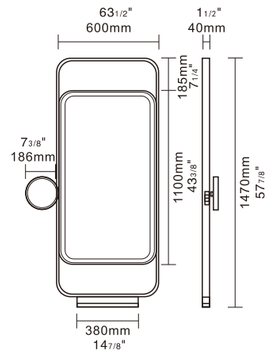

Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG900K

Characteristics:

* 1. 5mm high-definition environmentally friendly silvered mirror;
* Stainless steel frame with a matte black paint finish;
* Exterior decorative pre-mirror lighting with a 4000K color temperature;
*Equipped with a high safety-rated IP67 waterproof power supply;
* Single-set touch-sensitive switch configuration;
* Accessories: Tray, hair styling tool holder, power strip.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	36W	36W
Packing Size:	1040x 1040 x 270mm	40 7/8"x 40 7/8"x 10 1/2"
Unit weight:	14kg	31lb
CTN QTY.:(1pc)	27kg	60lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

1260ZW1-Y

Characteristics:

* 5mm high-definition eco-friendly silver mirror;
* Stainless steel frame with bamboo-pattern veneer;
* 3500K color temperature LED waterproof front mirror light;
* Single-group touch-sensitive switch configuration;
* High-safety IP67 waterproof power supply.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	60W	60W
Packing Size:	1330x 1170 x 105mm	52 3/4"x46"x 4 1/8"
Unit weight:	21kg	46lb
CTN QTY.:(1pc)	30kg	66lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

240424DK

Characteristics:

* 5mm high-definition eco-friendly silver mirror;
* Premium aluminum alloy titanium black brushed frame;
* Slim-edge design;
* 5000K color temperature LED waterproof front mirror light;
* Single-group touch-sensitive switch configuration;
* High-safety IP67 waterproof power supply.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	36W	36W
Packing Size:	1070X670X105mm	42 1/8"x 26 3/8"x 4 1/8"
Unit weight:	9.5kg	21lb
CTN QTY.:(1pc)	18kg	40lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

1100RK-DC

Characteristics:

* 5mm high-definition eco-friendly silver mirror;
* Premium aluminum alloy titanium black brushed frame;
*Slim-edge design;
* 6000K color temperature LED waterproof front mirror light;
*Anti-fog mirror design with imported PET anti-fog film;
* Single-group touch-sensitive switch configuration;
*High-safety IP67 waterproof power supply.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	45W	45W
Packing Size:	1770X770X105mm	69 3/4"x 30 3/8"x 4 1/8"
Unit weight:	12.5kg	28lb
CTN QTY.:(1pc)	22kg	49lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG100AK

Characteristics:

*The LED mirror light formed integrally with the mirror, beautiful and practical
*Comes with anti-fog function, easy to remove mist on the mirror. (Auto off after 30 mins)
*Indoor temperature display
*With touch control panel, use-friendly and convenient.
*Adopts high definition and eco-friendly silver mirror
*Material: aluminum alloy and 5mm eco-friendly silver mirror

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	38W	38W
Packing Size:	1070x 105 x 675mm	42 1/8"x 4 1/8"x 26 1/2"
Unit weight:	9.8kg	21.6lb
CTN QTY.:(1pc)	11.1kg	24.4lb

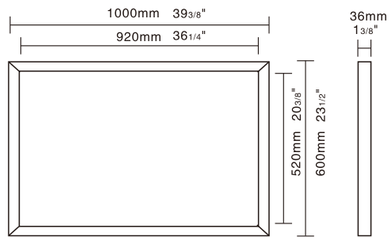

Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG100BK

Characteristics:

*The LED mirror light formed integrally with the mirror, beautiful and practical
*Comes with anti-fog function, easy to remove mist on the mirror. (Auto off after 30 mins)
*Indoor temperature display
*With touch control panel, use-friendly and convenient.
*Adopts high definition and eco-friendly silver mirror
*Material: aluminum alloy and 5mm eco-friendly silver mirror

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	78W	78W
Packing Size:	1070x 105 x 825mm	42 1/8"x 4 1/8"x 32 3/8"
Unit weight:	14kg	31lb
CTN QTY.:(1pc)	16kg	35.3lb

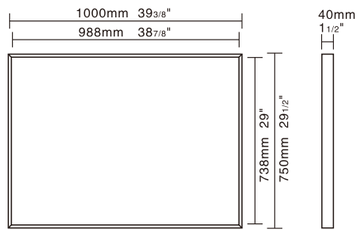

Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG900EK

Characteristics:

* 5mm high-definition eco-friendly silver mirror;
* Premium aluminum alloy electroplated brushed frame;
* Slim-edge design;
* 3000K color temperature LED waterproof front mirror light;
* Single-group touch-sensitive switch configuration;
* High-safety IP67 waterproof power supply.

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	45W	45W
Packing Size:	970x 970 x 105mm	38 1/8"x 38 1/8"x 4 1/8"
Unit weight:	10kg	22lb
CTN QTY.:(1pc)	22.5kg	50lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG75CK

Characteristics:

*The LED mirror light formed integrally with the mirror, beautiful and practical
*With touch control panel, use-friendly and convenient.
*Adopts high definition and eco-friendly silver mirror
*Material: aluminum alloy and 5mm eco-friendly silver mirror

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	29W	29W
Packing Size:	820x 105 x 820mm	32 1/4"x 4 1/8"x 32 1/4"
Unit weight:	10kg	22lb
CTN QTY.:(1pc)	11kg	24.2lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG50AK

Characteristics:

*The LED mirror light formed integrally with the mirror, beautiful and practical
*Comes with anti-fog function, easy to remove mist on the mirror. (Auto off after 30 mins)
*Indoor temperature display
*With touch control panel, use-friendly and convenient.
*Adopts high definition and eco-friendly silver mirror
*Material: 304 stainless steel and 5mm eco-friendly silver mirror

Specifications:

Voltage:	220V-240V~/50Hz	110-120V/60Hz
Rated Power:	25W	25W
Packing Size:	770x 105 x 590mm	30 1/4" x 4 1/8" x 23 1/4"
Unit weight:	6.5kg	14.3lb
CTN QTY.:(1pc)	7.4kg	16.3lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG1300K-MX-0

Characteristics:

*5mm high-definition eco-friendly silver mirror;
* Premium aluminum alloy brushed frame;

Specifications:

Packing Size:	1370x670X105mm	53 7/8"x 26 3/8"x 41/8"
Unit weight:	10.7kg	23.6lb
CTN QTY.:(1pc)	20kg	44lb

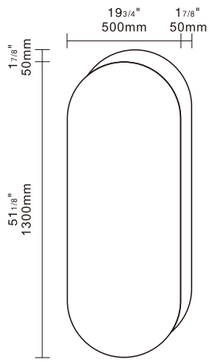

Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG50P

Characteristics:

*Adopts high definition and eco-friendly silver mirror
*Material: Artificial leather and 5mm eco-friendly silver mirror

Specifications:

Packing Size:	770x 105 x 570mm	30 3/8"x 41/8"x 22 3/8"
Unit weight:	8kg	17.6lb
CTN QTY.:(1pc)	9kg	19.8lb



Shape and size can be customized



MULTIFUNCTIONAL BATHROOM MIRROR COMBINATION SERIES

YSG55P

Characteristics:

*Adopts high definition and eco-friendly silver mirror
*Material: Artificial leather and 5mm eco-friendly silver mirror

Specifications:

Packing Size:	570x 105 x 570mm	22 3/8"x 41/8"x 22 3/8"
Unit weight:	8kg	17.6lb
CTN QTY.:(1pc)	9kg	19.8lb



Shape and size can be customized

SENSOR BIN





SATIN



BLACK



ICE BLUE



CHARTERUSE



20L



16L



12L



9L









SENSOR BIN

LJT2288

Characteristics:

*Unique touch bin opening lid technology
*Infrared induction, touch button to open and close the lid
*5 seconds delayed close function, silent cushion close technology
*Humanization buckle design, Specially equipped with deodorant, anti–insect box
*The bin is made of anti–fingerprint stainless steel, different color panels can be selected
*Special holder design, preventing bacterial growth



Infrared Sensor



Infrared sensor



Feather touch button to open and close



5 seconds delayed close function



Humanization buckle design



Silent cushion close technology

Specifications:

Voltage:	3.7V/ DC4x1.5V(LR6)		
Packing Size:	350x350x635mm	13 3/4"x13 3/4"x25"	(20L)
	350x350x565mm	13 3/4"x13 3/4"x22 1/4"	(16L)
	310x310x540mm	12 1/4"x12 1/4"x19 7/8"	(12L)
	310x310x455mm	12 1/4"x12 1/4"x17 7/8"	(9L)
Unit weight:	3.4kg	7 .5lb	(20L)
	3.1kg	6.8 lb	(16L)
	3kg	6.6 lb	(12L)
	2.7kg	6 lb	(9L)
CTN QTY.:1(pcs)	5.4kg	12 lb	(20L)
	4.9kg	11 lb	(16L)
	4.6kg	10 lb	(12L)
	4kg	9 lb	(9L)
CTNS of 20'FT:	288pcs(CTNS)		(20L)
	384pcs(CTNS)		(16L)
	532pcs(CTNS)		(12L)
	665pcs(CTNS)		(9L)



BIN–TOUCH LID OPENING TECHNOLOGY



AUTOMATIC SENSOR



TOUCH SWITCH



STAY OPEN FOR 5 SECONDS



FINGERPRINT RESISTANT



BIN

LJT40K-R

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with satin finish,
*which is durable and steady
*40L big capacity and easy to clean

Specifications:

Packing Size:	340x265x525mm	13 3/8"x10 3/8"x20 1/2"
Unit weight:	4.83kg	10.6 lb
CTN QTY.:1(pcs)	5.76kg	12.7 lb
CTNS of 20'FT:	657pcs (657CTNS)	



BIN

LJT40K-H

Characteristics:

*Made of type 304, 22guage (0.8mm) stainless steel with satin finish,
*which is durable and steady
*40L big capacity and easy to clean.

Specifications:

Packing Size:	340x285x525mm	13 3/8"x11 1/4"x20 1/2"
Unit weight:	5.6kg	12.3 lb
CTN QTY.:1(pcs)	6.3kg	13.9 lb
CTNS of 20'FT:	584pcs (584CTNS)	







BIN

LJT2308

Characteristics:

*Capacity：6L

Specifications:

Packing Size:	280x280x325mm	11"x11"x12 3/4"
Unit weight:	1. 2kg	2.6 lb
CTN QTY.:1(pcs)	1.5kg	3.3 lb
CTNS of 20'FT:	1120pcs(1120CTNS)	

Satin

Champagnegold

Titanium black

